

FACADE CLADDINGS

ACCESSORIES





RAUTA
RELIABLE SOLUTIONS

● Content

Support studs	3-9
Support stud joint pieces	10
Adjustable fastener	11-12
Starting fillets	13-15
Flashings	16
- Plinth flashings	16
- Sill flashings	17
- Vertical joint flashings	18-23
- External corner flashings	23-29
- Internal corner flashings	30-35
- Cover flashings	35-41
- Eaves flashings	41-43
- Storm flashings	43-44
- Support flashings	44-45
- Reverse flashings	45
Joint pieces	46-49
Fastening screws	50-52
Sealings	53
Other accessories	54
- Fastening socket	54
- Gap template	54
- Reparation paints	55

This brochure includes the main accessories of facade claddings. They do not directly fit for use in all construction sites. In conflict situations act according to the instructions of the structural designer or contact our technical support (contact information on the last page of this brochure).

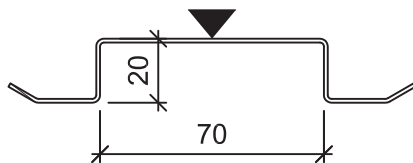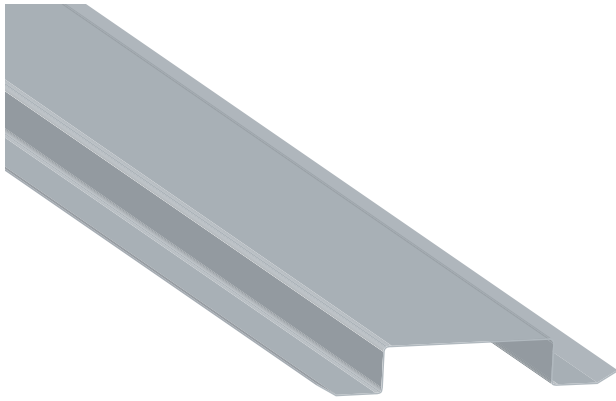

• Product properties

Product name	Support stud CA1SS1
Standard length	3000 mm
Special range	150–4000 mm
Blank width	170 mm
Weight	1,6 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Sub-frame stud for facade claddings (excluding Cor-Ten claddings).

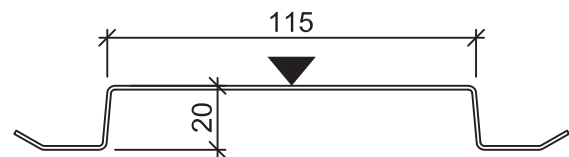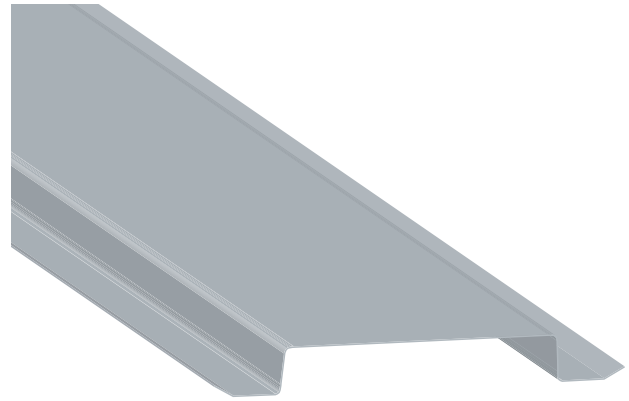

• Product properties

Product name	Support stud CA1SS2
Standard length	3000 mm
Special range	150–4000 mm
Blank width	250 mm
Weight	2,4 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Sub-frame stud for facade claddings (excluding Cor-Ten claddings).

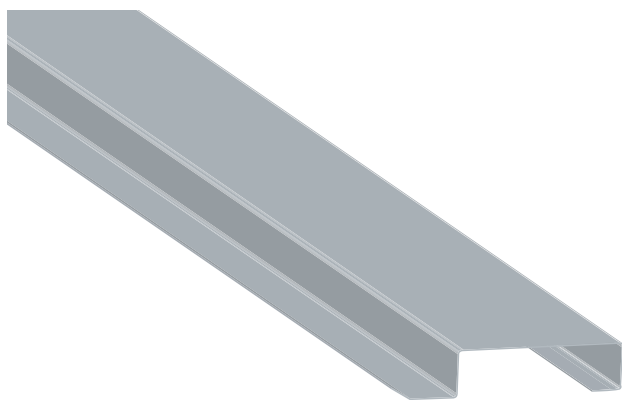

• Product properties

Product name	Support stud CA1RS1
Standard length	3000 mm
Special range	150–4000 mm
Blank width	150 mm
Weight	1,4 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



Colour chart		Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Sub-frame stud for facade claddings (excluding Cor-Ten claddings). next to windows and doors.

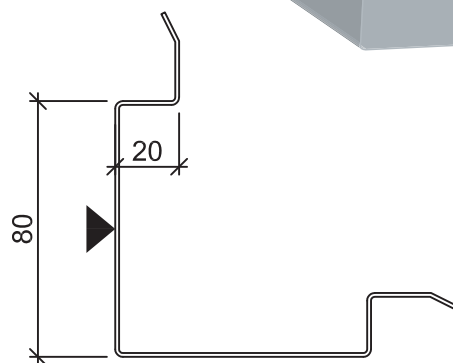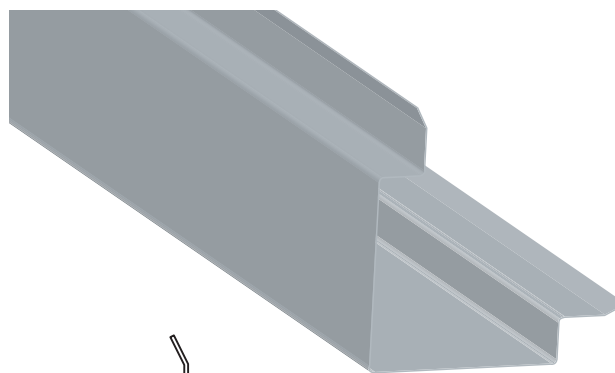

• Product properties

Product name	Support stud corner CA1SSC1
Standard length	3000 mm
Special range	150–4000 mm
Blank width	250 mm
Weight	2,4 kg/
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



Colour chart		Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Sub-frame stud for facade claddings (excluding Cor-Ten claddings), external corners.

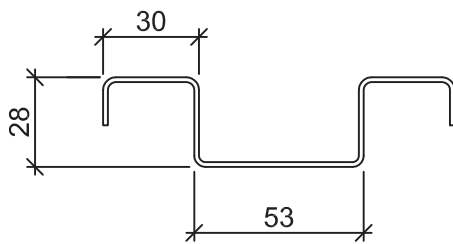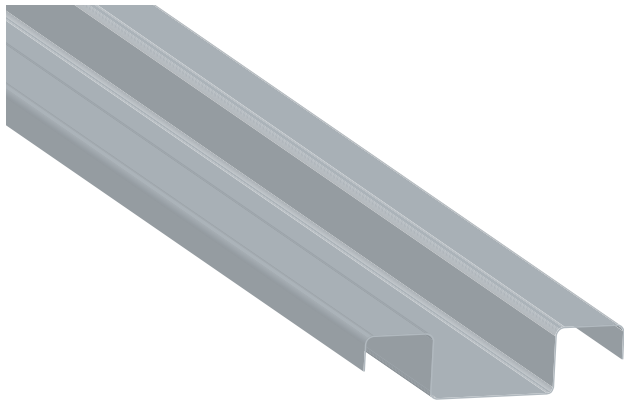

- **Product properties**

Product name	Support stud CA1SS3
Standard length	3000 mm
Special range	150–4000 mm
Blank width	189 mm
Weight	2,2 kg/m
Unit	m

- **Materials, coatings and colours**



1,5 mm steel Cor-Ten A

Minimum order sizes:

– No limitations

- **Intended use**

Sub-frame stud for Liberta Cor-Ten products.

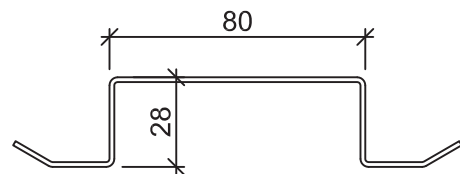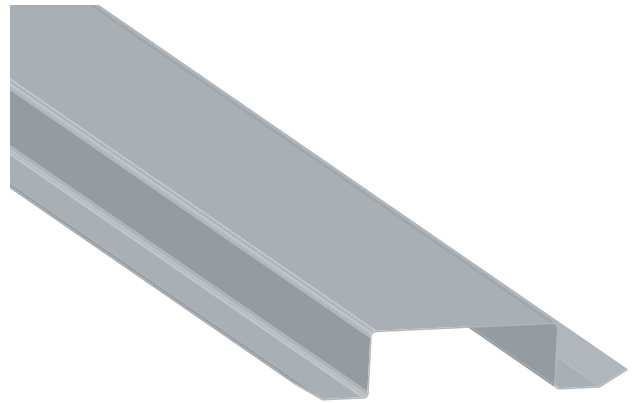

- **Product properties**

Product name	Support stud CA1SS4
Standard length	3000 mm
Special range	150–4000 mm
Blank width	192 mm
Weight	2,3 kg/pcs
Unit	m

- **Materials, coatings and colours**


1,5 mm steel Cor-Ten A

Minimum order sizes:

–no limitations

- **Intended use**

Sub-frame stud for Cor-Ten facade claddings.

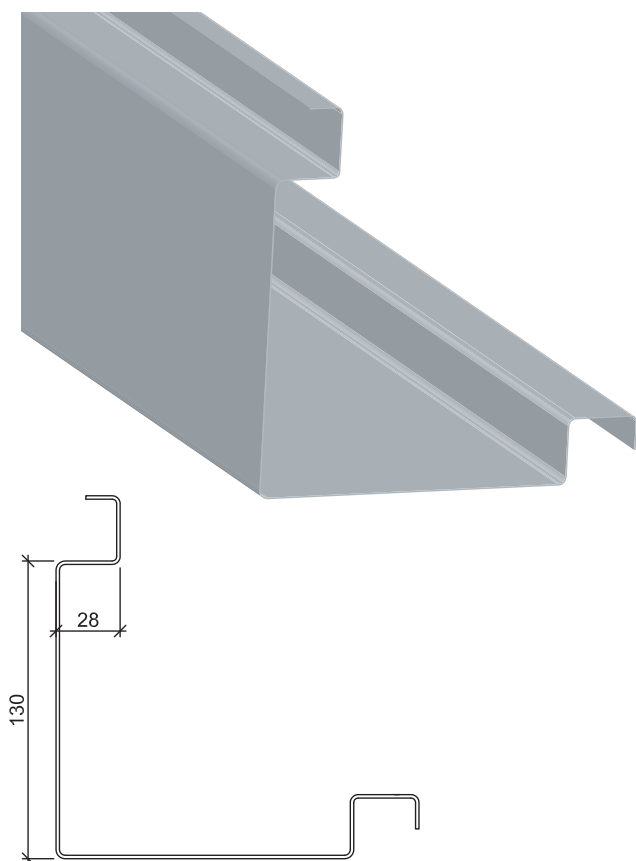

- **Product properties**

Product name	Support stud corner CA1SSC2
Standard length	3000 mm
Special range	150–4000 mm
Blank width	396 mm
Weight	2,3 kg/m
Unit	m


- **Materials, coatings and colours**

1,5 mm steel Cor-Ten A

Minimum order sizes:
– No limitations

- **Intended use**

Sub-frame stud for Cor-Ten facade claddings,
external corners.

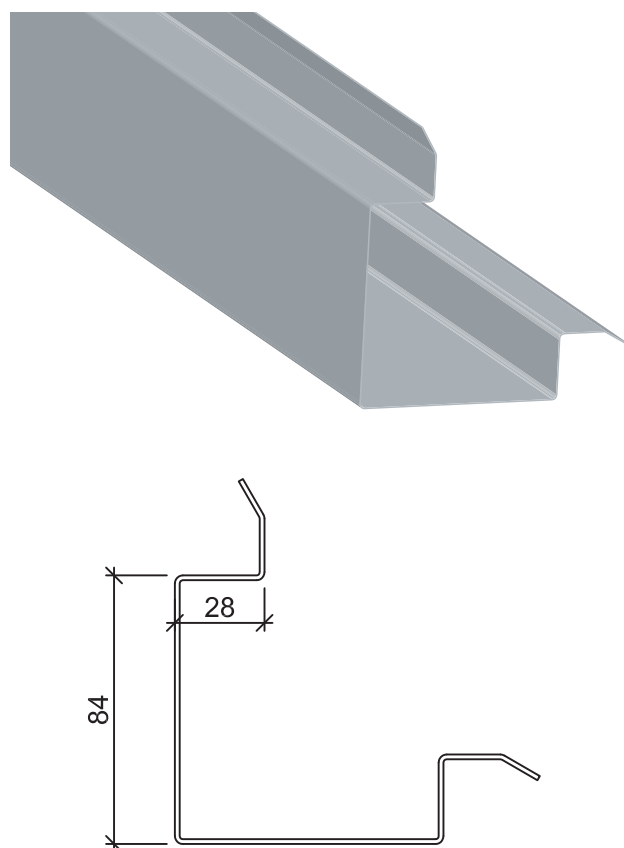

- **Product properties**

Product name	Support stud corner CA1SSC3
Standard length	3000 mm
Special range	150–4000 mm
Blank width	280 mm
Weight	3,3 kg/m
Unit	m



- **Materials, coatings and colours**

1,5 mm steel Cor-Ten A

Minimum order sizes:
– No limitations

- **Intended use**

Sub-frame stud for Cor-Ten facade claddings,
external corners.

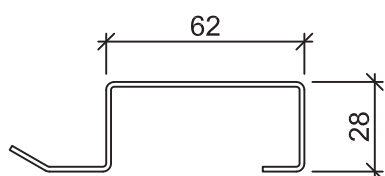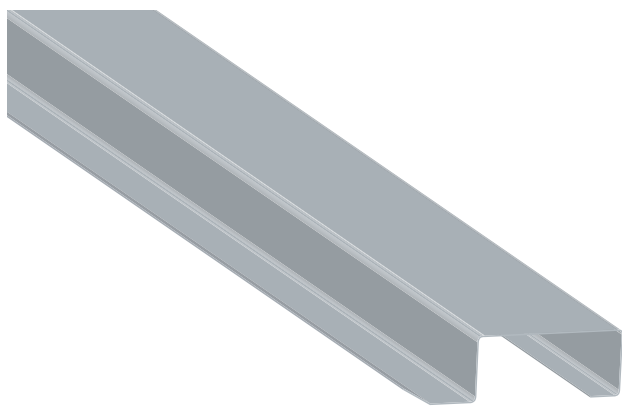

- **Product properties**

Product name	Support stud CA1RS2
Standard length	3000 mm
Special range	150–4000 mm
Blank width	156 mm
Weight	1,8 kg/m
Unit	m



- **Materials, coatings and colours**

1,5 mm steel Cor-Ten A

Minimum order sizes:
– No limitations

- **Intended use**

Sub-frame stud for Cor-Ten facade claddings, next to windows and doors.

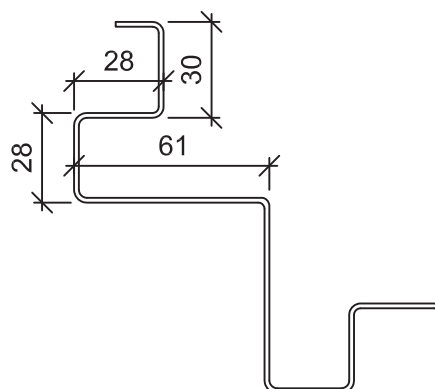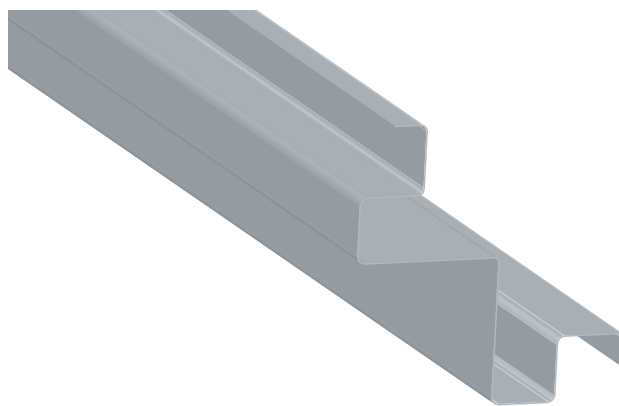

- **Product properties**

Product name	Support stud CA1SSC4
Standard length	3000 mm
Special range	150–4000 mm
Blank width	312 mm
Weight	3,7 kg/m
Unit	m



- **Materials, coatings and colours**

1,5 mm steel Cor-Ten A

Minimum order sizes:
– No limitations

- **Intended use**

Sub-frame stud for Cor-Ten facade claddings, internal corners.

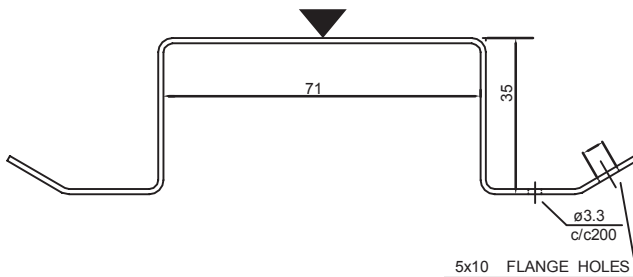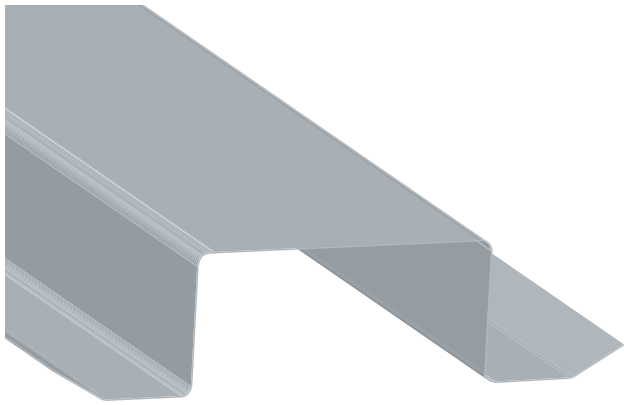

• Product properties

Product name	Support stud CA1SS-A
Standard length	3000 mm
Special range	150–4000 mm
Blank width	205 mm
Weight	1,9 kg/m
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
--------	---------------------

Standard:

HIARC Matt	RR45
------------	------

Minimum order sizes:

- Standard chart: No limitations



• Intended use

Sub-frame stud for Liberta Solar panels, used at vertical joints.

• Note

Stud has pre-punched holes as follows:

- c/c 200 for fasteners
- c/c 630 for cable ties
- c/c 660 for cables

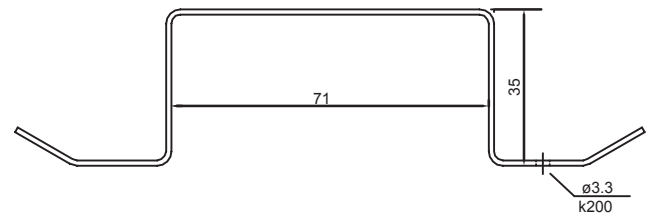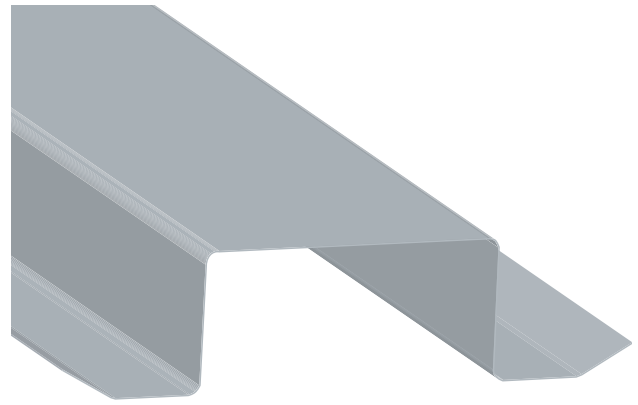

• Product properties

Product name	Support stud CA1SS-B
Standard length	3000 mm
Special range	150–4000 mm
Blank width	205 mm
Weight	1,9 kg/m
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
--------	------------------



• Intended use

Sub-frame stud for Liberta Solar panels, used at the middle of panels.

• Note

Stud has pre-punched holes as follows:

- c/c 200 for fasteners
- c/c 630 for cable ties
- c/c 660 for cables

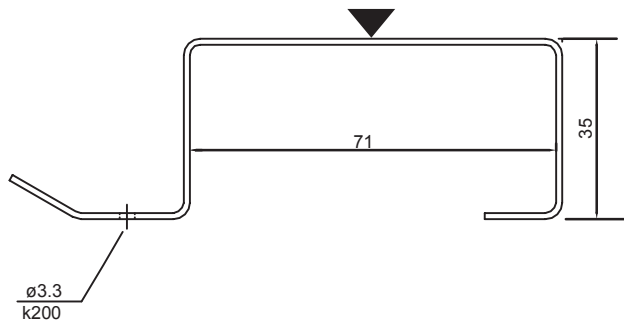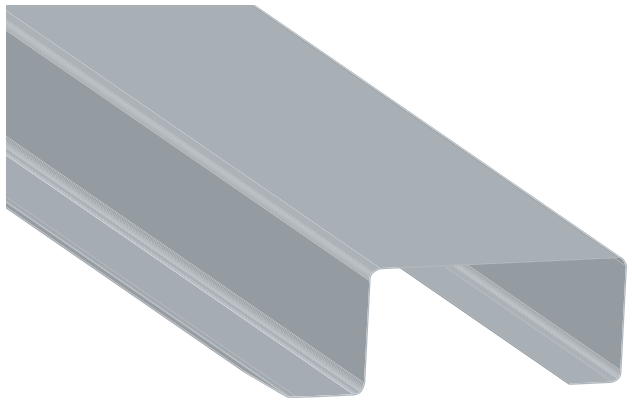

- **Product properties**

Product name	Support stud CA1SS -edge
Standard length	3000 mm
Special range	150–4000 mm
Blank width	183 mm
Weight	1,7 kg/m
Unit	m

- **Materials, coatings and colours**

1,2 mm	Steel
--------	-------

Standard:



HIARC Matt	RR45
------------	------

Minimum order sizes:

- Standard chart: No limitations

- **Intended use**

Sub-frame stud for Liberta Solar panels, used next to windows and doors.

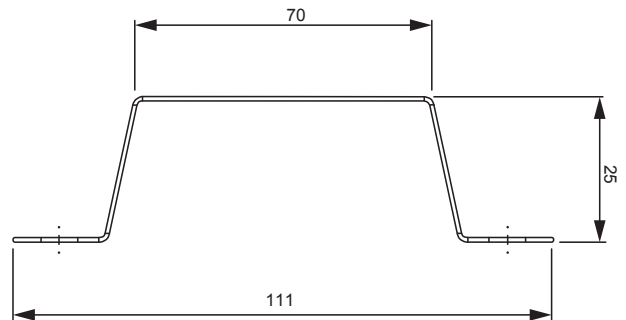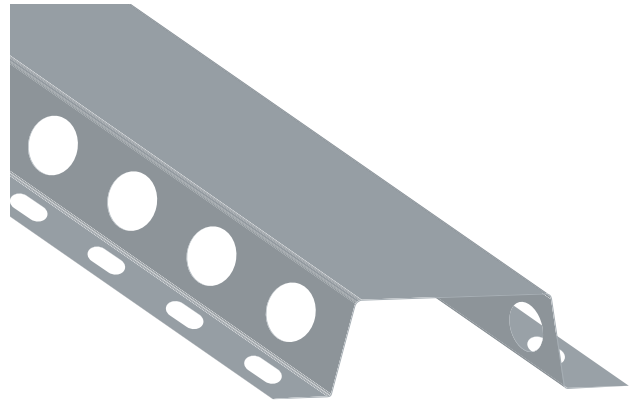

- **Product properties**

Product name	Support stud VAP 25
Standard length	2515 mm
Special range	mm
Weight	1,1 kg/m
Unit	m

- **Materials, coatings and colours**

1,0 mm	Galvanized steel
1,0 mm	Colour coated steel, Pural RR23 both sides

Minimum order sizes:


- No limitations

- **Intended use**

Sub-frame for façade claddings (excluding Cor-Ten claddings).

- **Note**

Ventilated (perforation rate 29%)
Fixing holes $d=6\text{mm}$, c/c 56mm

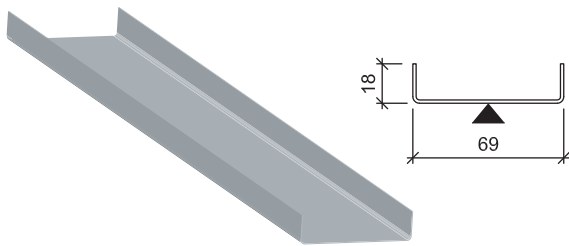

- **Product properties**


Product name	Support stud joint piece CA1SSJ1
Standard length	200 mm
Blank width	99 mm
Weight	0,23 kg/pcs (steel)
Unit	pcs

- **Materials, coatings and colours**

1,5 mm	Zinc coated steel
1,5 mm	Aluminum

- **Intended use**

Connecting support studs CA1SS1 together.
Recommended when using adjustable bracket system.

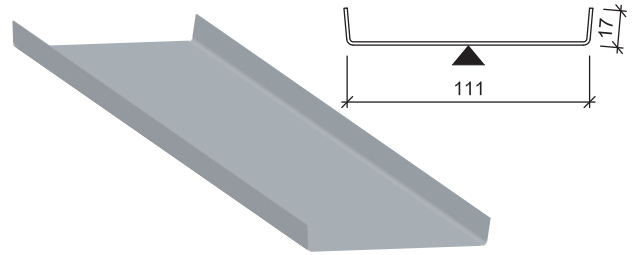

- **Product properties**


Product name	Support stud joint piece CA1SSJ2
Standard length	200 mm
Blank width	139 mm
Weight	0,33 kg/pcs (steel)
Unit	pcs

- **Materials, coatings and colours**

1,5 mm	Zinc coated steel
1,5 mm	Aluminum

- **Intended use**

Connecting support studs CA1SS2 together.
Recommended when using adjustable bracket system.

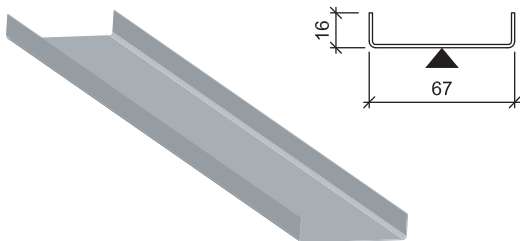

- **Product properties**



Product name	Support stud joint piece CA1SSJ3
Standard length	200 mm
Blank width	93 mm
Weight	0,22 kg/pcs (steel)
Unit	pcs

- **Materials, coatings and colours**

1,5 mm	Zinc coated steel
1,5 mm	Aluminum

- **Intended use**

Connecting support studs CA1SS3 together.
Recommended when using adjustable bracket system.

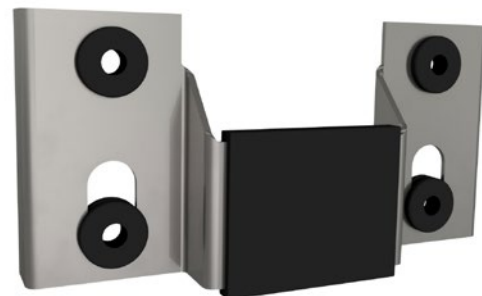


- **Product properties**

Product name	Support stud joint piece CA1SSJ5
Thickness	1,5mm stainless steel
Weight	0,08 kg/pc
Package unit	pc

- **Intended use**

Fastening Liberta Cor-Ten 800 panels onto support stud CA1SS3. Joint piece includes needed EPDM separators as shown in the product picture above.

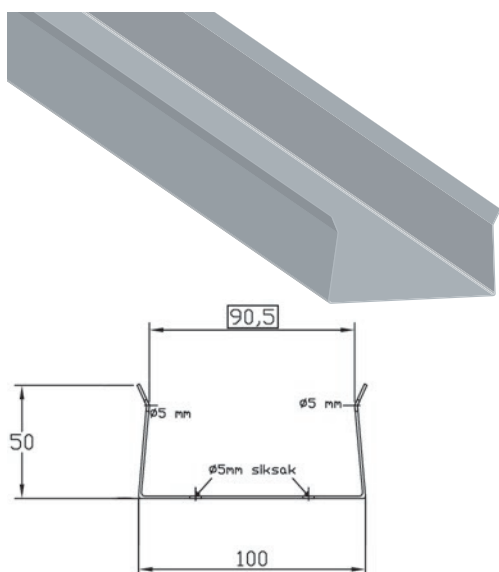

• Product properties

Product name	Adjustable stud CA1SS5
Standard length	3000 mm
Special range	150–3000 mm
Blank width	193 mm
Weight	1,8 kg/m
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

Bottom part of 2-part adjustable stud system, used together with Adjustable stud CA1SS6. See next page for more information.

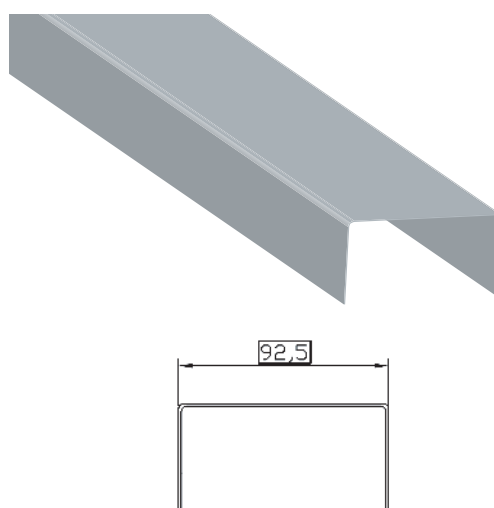

• Product properties

Product name	Adjustable stud CA1SS6
Standard length	3000 mm
Special range	150–4000 mm
Blank width	183 mm
Weight	1,7 kg/m
Unit	m

• Materials, coatings and colours

1,2 mm	Galvanized steel
1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum

	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request



Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use



Top part of 2-part adjustable stud system, used together with Adjustable stud CA1SS5. See next page for more information.

- **Installation of adjustable studs CA1SS5 and CA1SS6**

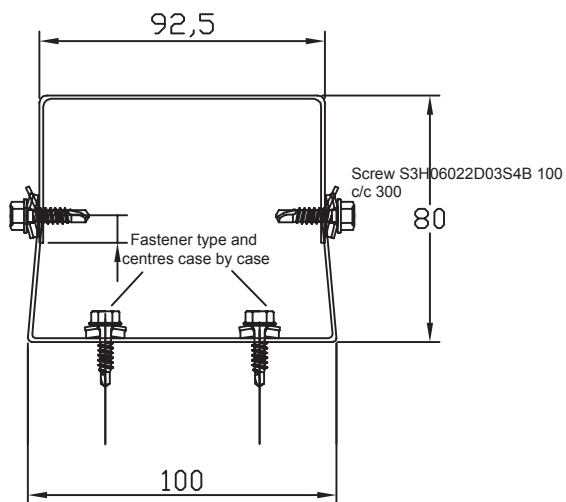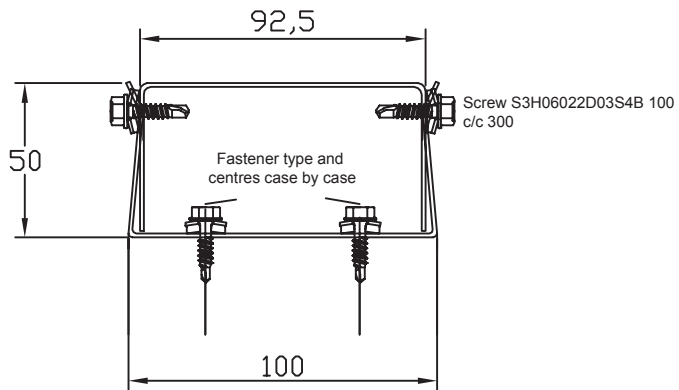

- **Note**

The friction between studs helps to keep them together while adjusting the depth during installation. Studs must be locked together with fastening screws immediately after adjusting.

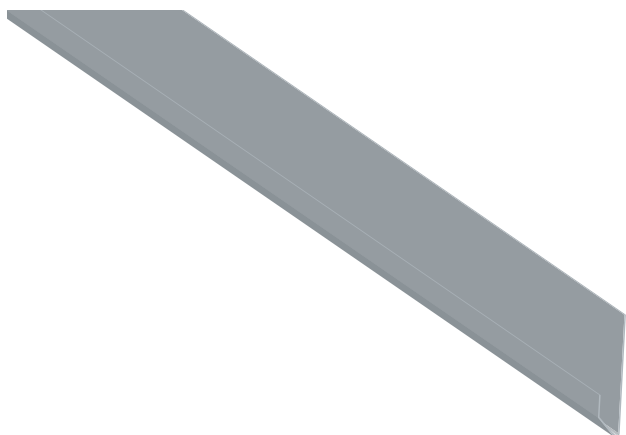

• Product properties

Product name	Starting fillet CA1SF2
Standard length	3000 mm
Special range	150–3000 mm
Blank width	70 mm
Weight	0,66 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

Starting fillet for Liberta elegant 500 / 500 Grande

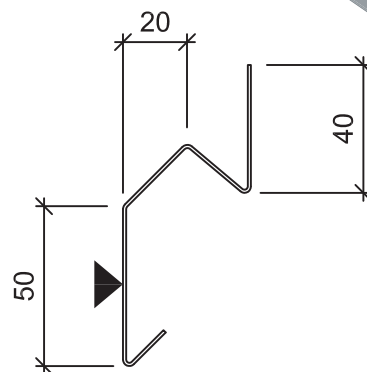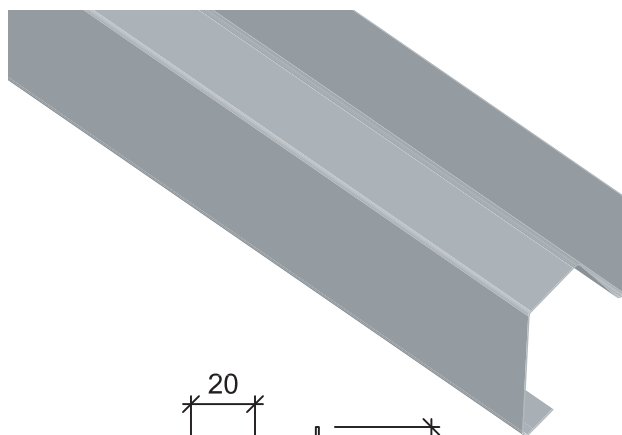

• Product properties

Product name	Starting fillet CA1SF3
Standard length	3000 mm
Special range	150–3000 mm
Blank width	150 mm
Weight	1,4 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

Starting fillet for Lamella groove 10 / groove 20

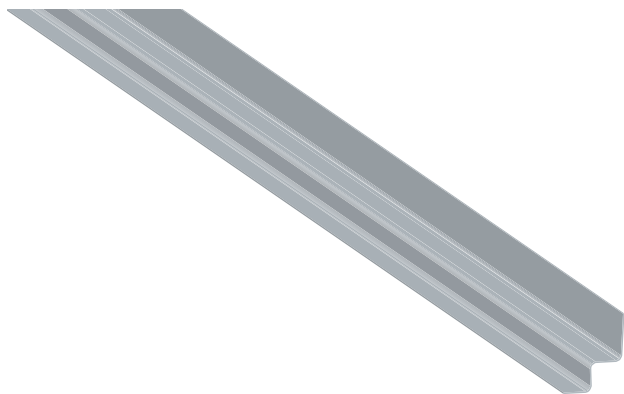

• Product properties

Product name	Starting fillet CA1SF4
Standard length	3000 mm
Special range	150–3000 mm
Blank width	52 mm
Weight	0,49 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Starting fillet for Lamella sharp 45

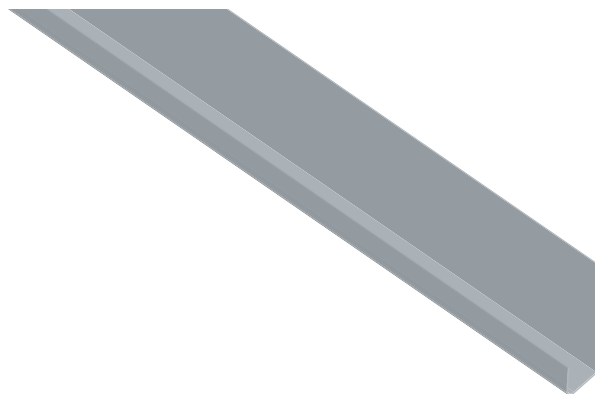

• Product properties

Product name	Starting fillet CA1SF5
Standard length	3000 mm
Special range	150–3000 mm
Blank width	70 mm
Weight	0,66 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Starting fillet for Lamella lap 60

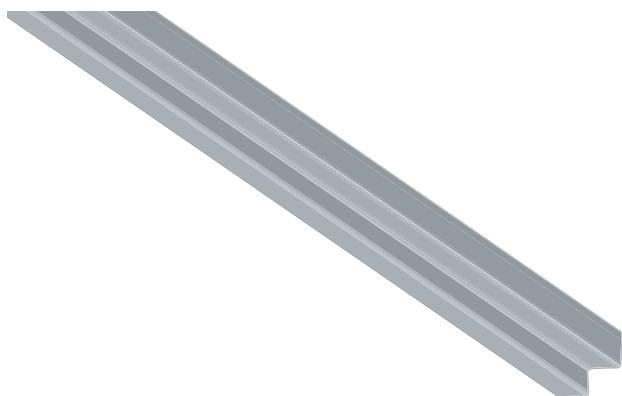

• Product properties

Product name	Starting fillet CA1SF7
Standard length	3000 mm
Special range	150–3000 mm
Blank width	49 mm
Weight	0,62 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Starting fillet for Lamella straight 100

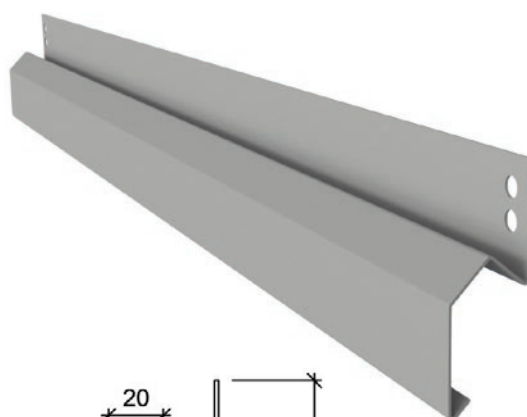

• Product properties

Product name	Starting fillet CA1SF8
Standard length	3000 mm
Special range	150–3000 mm
Blank width	171 mm
Weight	1,95 kg/m (steel)
Unit	m

• Materials, coatings and colours



1,5 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- Standard chart: No limitations

• Intended use

Starting fillet for Lamella Cor-Ten 20

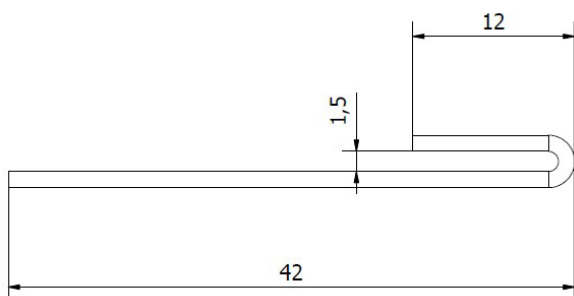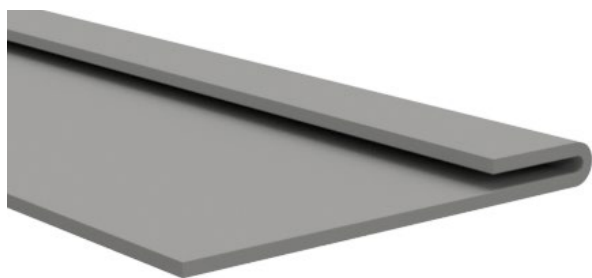

• Product properties

Product name	Starting fillet CA1SF9
Standard length	3000 mm
Special range	150–3 000 mm
Blank width	54 mm
Weight	0,52 kg/m (steel)
Unit	m

• Materials, coatings and colours

1,2 mm	Colour coated steel
1,5 mm	Colour coated aluminium



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminium	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Starting fillet for Liberta 550

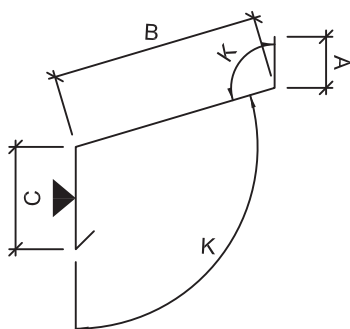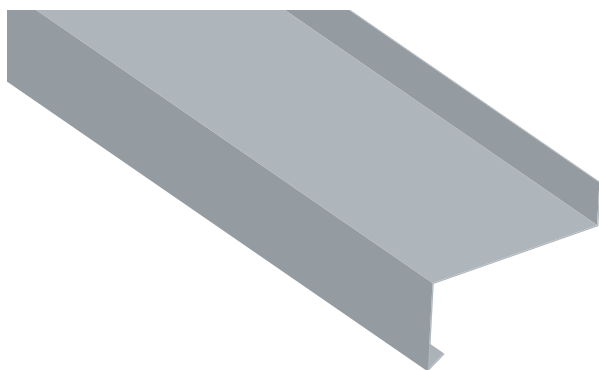

• Product properties

Product name	Plinth flashing CA1P1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 12 C: 15
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

For covering the space between facade cladding and plinth.

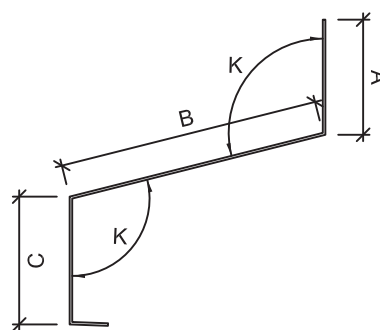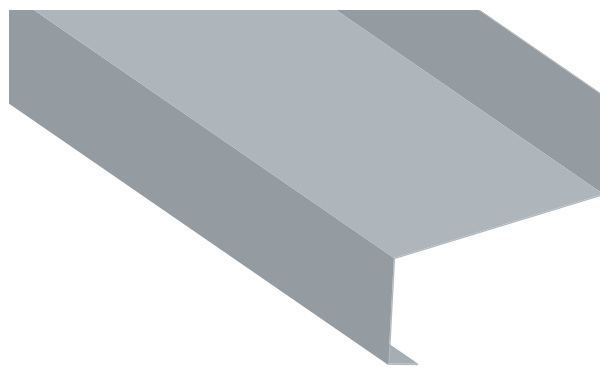

• Product properties

Product name	Plinth flashing CA1P2X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 12 C: 12
Weight	–
Unit	m

• Materials, coatings and colours



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

For covering the space between cladding and plinth. Used with Cor-Ten facade claddings.

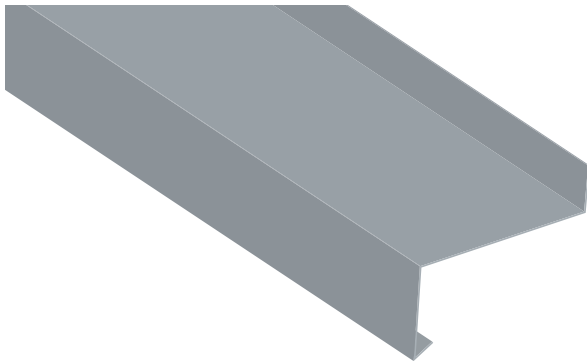

• Product properties

Product name	Sill flashing CA1S1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 12 C: 15
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Steel
0,7 mm	Aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, RR21, RR22, RR23, RR40, 41, 45
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, RR24, RR26, RR29, RR30, RR31, RR32, RR33, RR34, RR35, RR36, RR37, RR42, RR43, RR44, RR750
		Powder paint	RAL and NCS colours available by request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available by request
		Powder paint	RR, RAL and NCS colours available by request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: decided on a project basis

• Intended use

For covering the space between facade cladding and window cill.

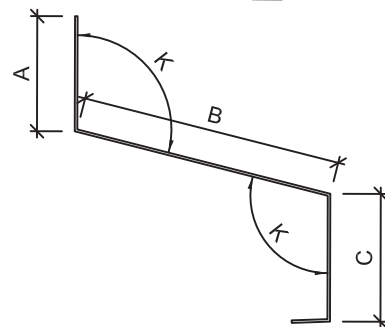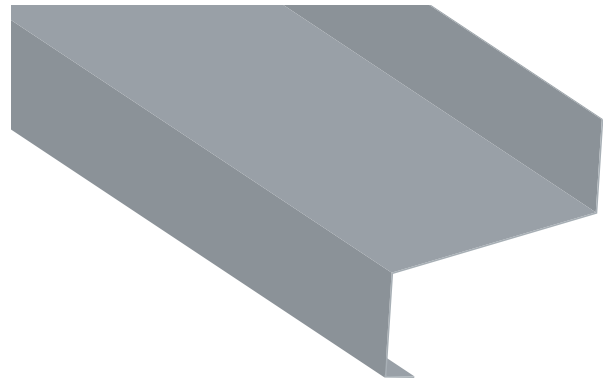

• Product properties

Product name	Sill flashing CA1S2X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 12 C: 12
Weight	–
Unit	m

• Materials, coatings and colours



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

For covering the space between facade cladding and window cill. Used with Cor-Ten facade claddings.

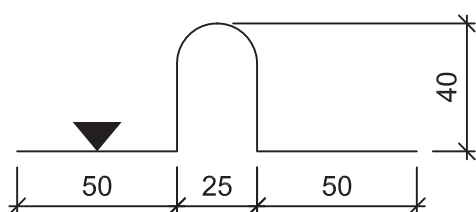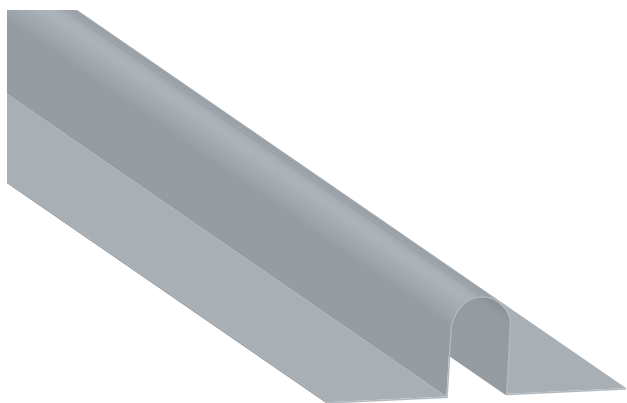

• Product properties

Product name	Vertical joint flashing CA1VJ1
Standard length	3000 mm
Special range	150–4000 mm
Blank width	192 mm
Weight	0,90 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

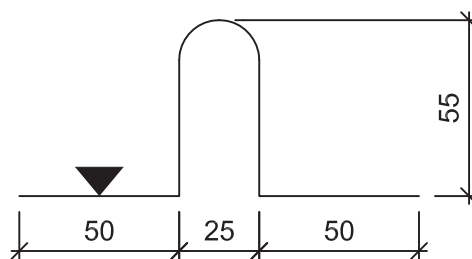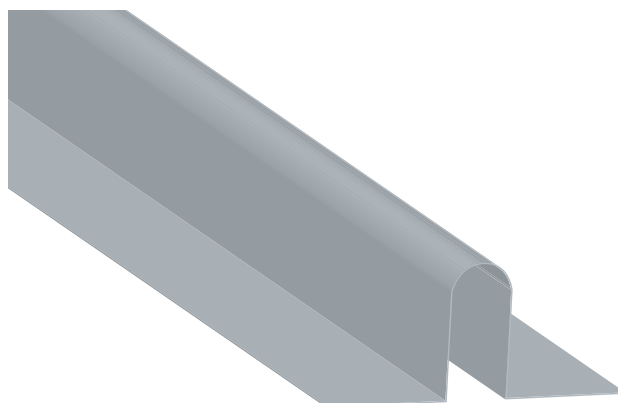

• Product properties

Product name	Vertical joint flashing CA1VJ2
Standard length	3000 mm
Special range	150–4000 mm
Blank width	222 mm
Weight	1,0 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

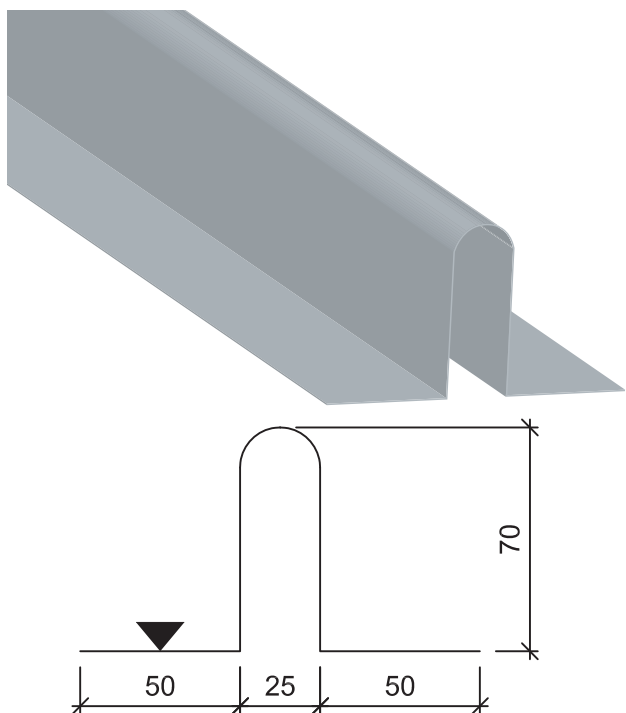

• Product properties

Product name	Vertical joint flashing CA1VJ3
Standard length	3000 mm
Special range	150–4000 mm
Blank width	252 mm
Weight	1,2 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

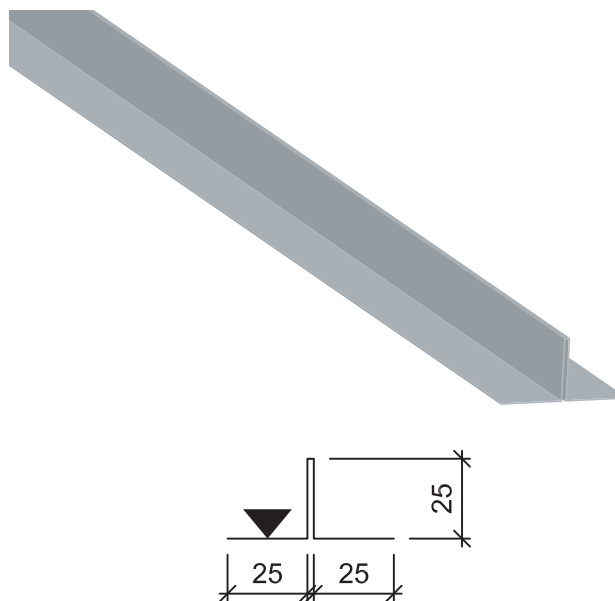

• Product properties

Product name	Vertical joint flashing CA1VJ4
Standard length	3000 mm
Special range	150–4000 mm
Blank width	100 mm
Weight	0,47 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

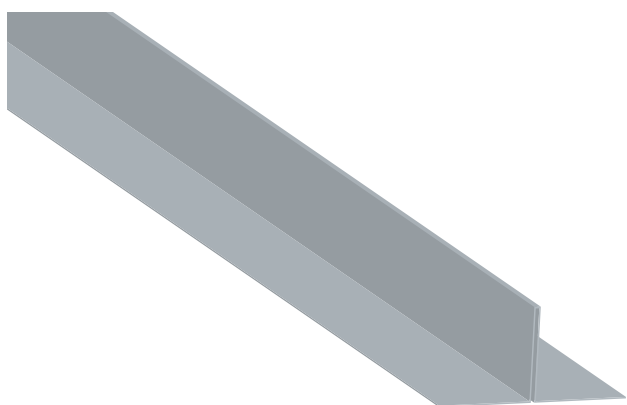

• Product properties

Product name	Vertical joint flashing CA1VJ5
Standard length	3000 mm
Special range	150–4000 mm
Blank width	152 mm
Weight	0,72 kg/m
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

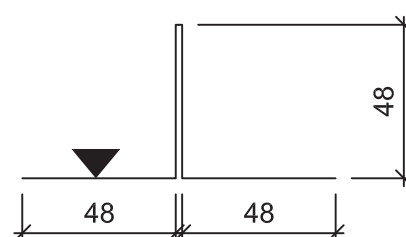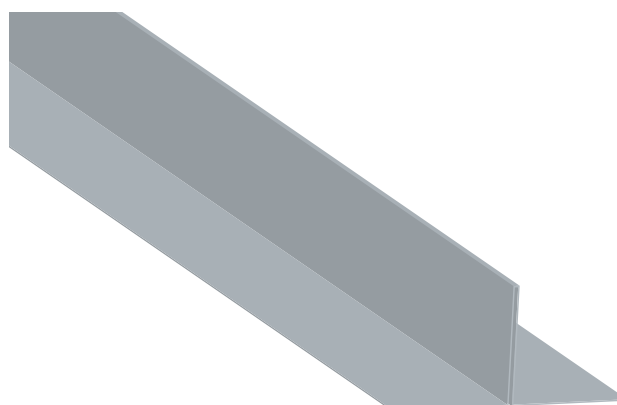

• Product properties

Product name	Vertical joint flashing CA1VJ6
Standard length	3000 mm
Special range	150–4000 mm
Blank width	192 mm
Weight	0,90 kg/m
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

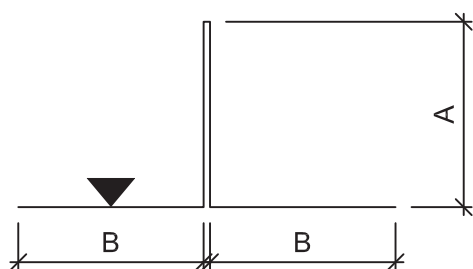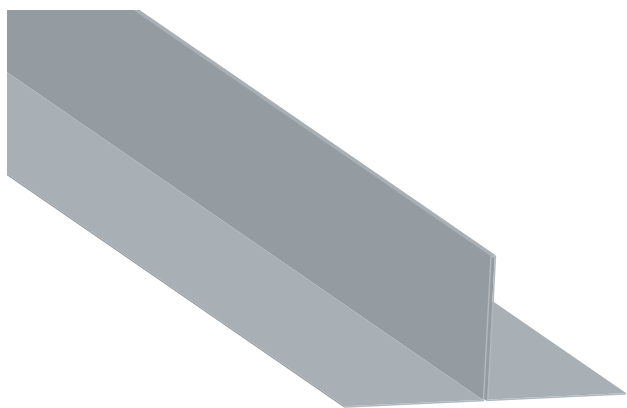

• Product properties

Product name	Vertical joint flashing CA1VJ7X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 20 B: 12
Maximum values	B: 55
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

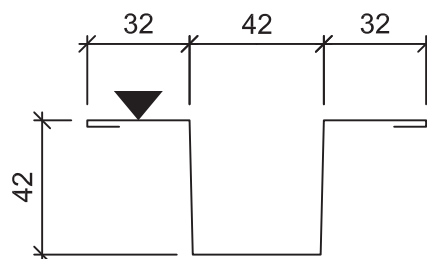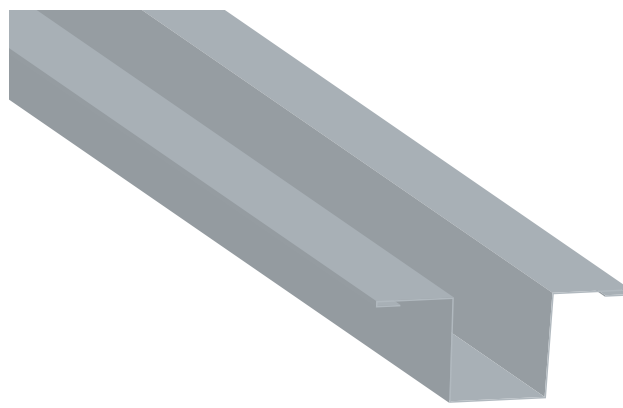

• Product properties

Product name	Vertical joint flashing CA1VJ8
Standard length	3000 mm
Special range	150–4000 mm
Blank width	208 mm
Weight	0,89 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

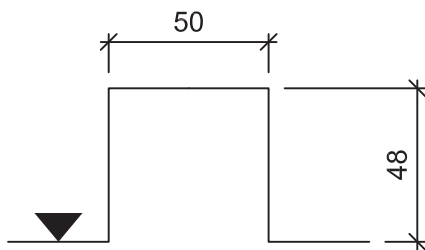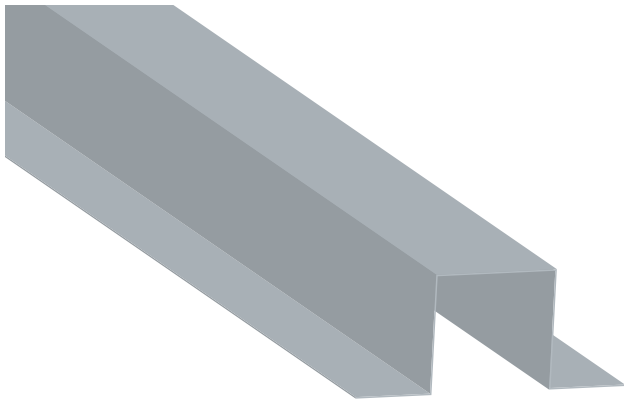

• Product properties

Product name	Vertical joint flashing CA1VJ14
Standard length	3000 mm
Special range	150–4000 mm
Blank width	210 mm
Weight	0,99 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Vertical joint flashing for Design profiles and Cladding lamellas.

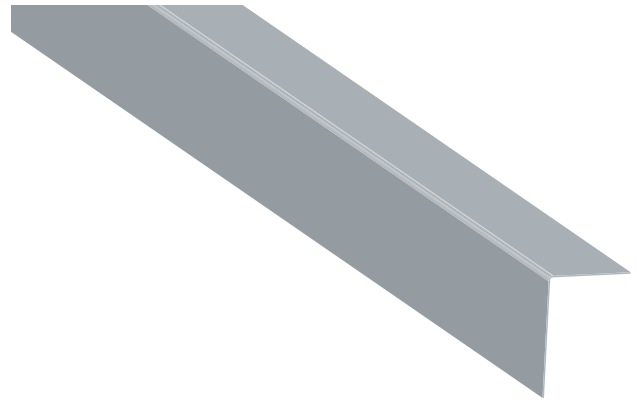

• Product properties

Product name	Vertical joint flashing CA1VJ16
Standard length	3000 mm
Special range	150–4000 mm
Blank width	82 mm
Weight	0,97 kg/m
Unit	m

• Materials, coatings and colours



1,5 mm	steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

Vertical joint flashing for Cladding lamellas (Cor-Ten).

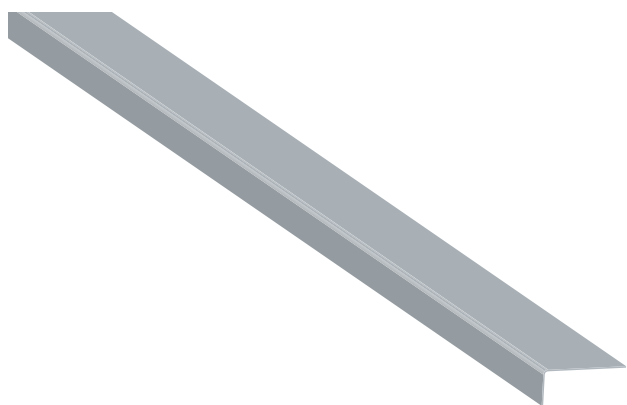

- **Product properties**

Product name	Vertical joint flashing CA1VJ17
Standard length	3000 mm
Special range	150–4000 mm
Blank width	47 mm
Weight	0,55 kg/m
Unit	m

- **Materials, coatings and colours**



1,5 mm steel Cor-Ten A

Minimum order sizes:

- No limitations

- **Intended use**

Vertical joint flashing for Design profiles (Cor-Ten).

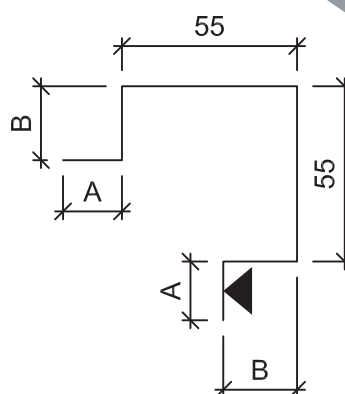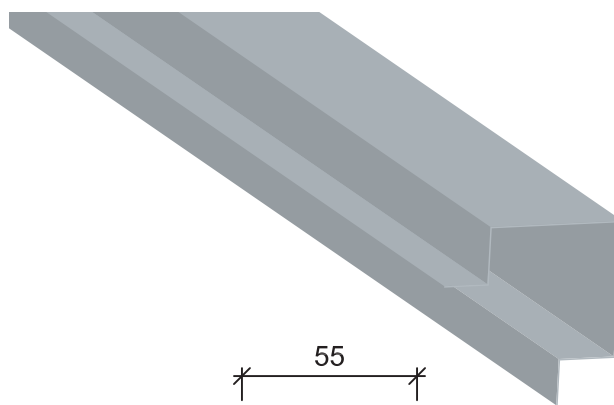

- **Product properties**

Product name	External corner flashing CA1EC1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 10 B: 12
Weight	–
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

External corner flashing for Design profiles and Cladding lamellas.

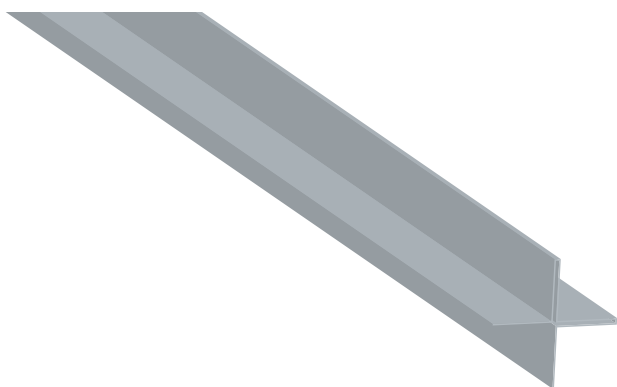

• Product properties

Product name	External corner flashing CA1EC4
Standard length	3000 mm
Special range	150–4000 mm
Blank width	150 mm
Weight	0,71 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Design profiles and Cladding lamellas.

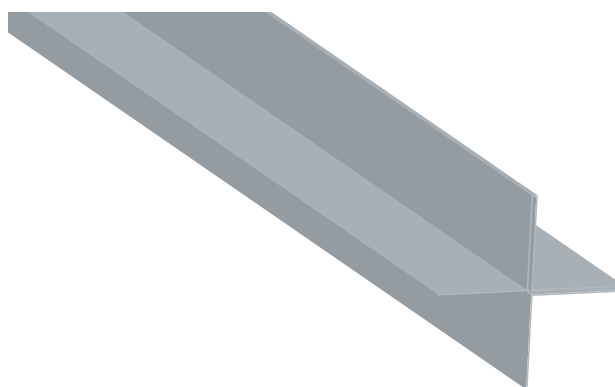

• Product properties

Product name	External corner flashing CA1EC5
Standard length	3000 mm
Special range	150–4000 mm
Blank width	228 mm
Weight	1,1 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Design profiles and Cladding lamellas.

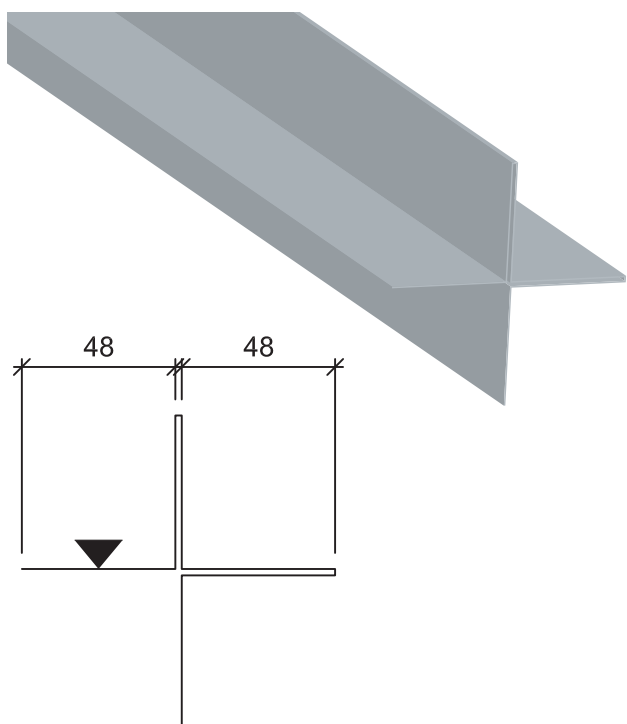

- **Product properties**

Product name	External corner flashing CA1EC6
Standard length	3000 mm
Special range	150–4000 mm
Blank width	288 mm
Weight	1,4 kg/m
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

External corner flashing for Design profiles and Cladding lamellas.

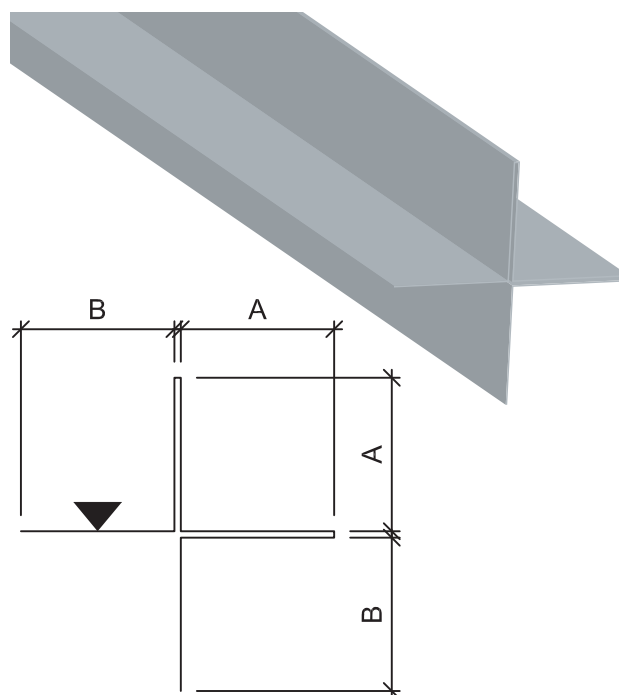

- **Product properties**

Product name	External corner flashing CA1EC7X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 20 B: 12
Maximum values	B: 55
Weight	–
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

External corner flashing for Design profiles and Cladding lamellas.

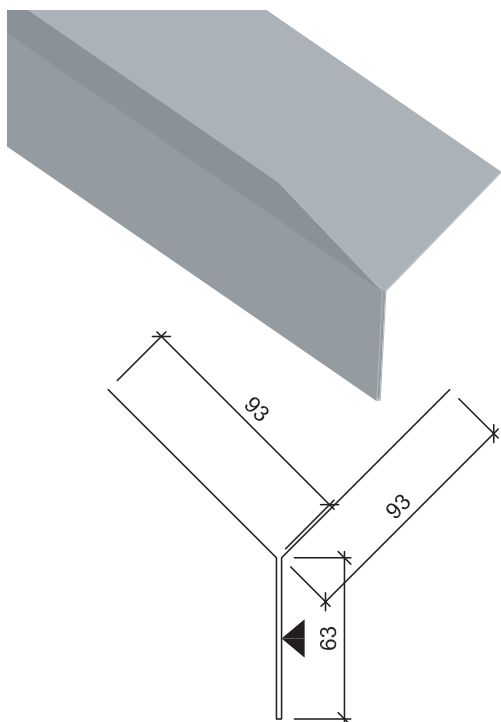

- **Product properties**

Product name	External corner flashing CA1EC8
Standard length	3000 mm
Special range	150–4000 mm
Blank width	312 mm
Weight	1,5 kg/m (steel)
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

External corner flashing for Cladding lamellas.

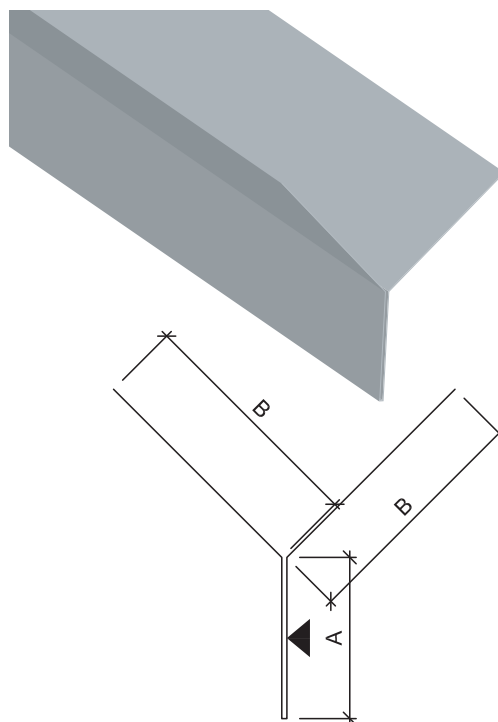

- **Product properties**

Product name	External corner flashing CA1EC9X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 20 B: 12
Weight	–
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

External corner flashing for Cladding lamellas.

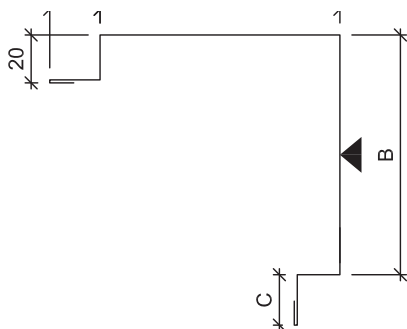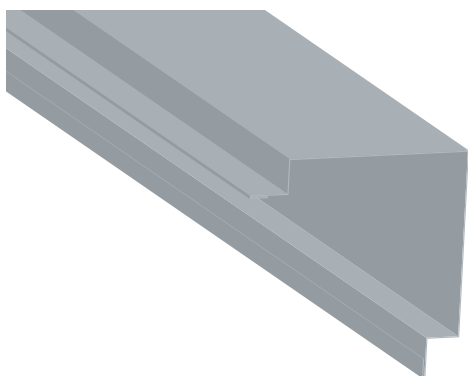

• Product properties

Product name	External corner flashing CA1EC10X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 30 B: 30 C: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Cladding lamella Vertical 70.

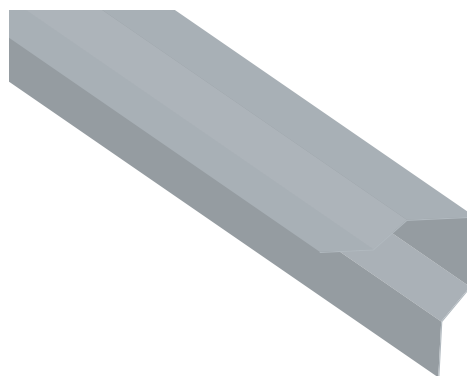

• Product properties

Product name	External corner flashing CA1EC11X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 12 C: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Design profiles and Cladding lamellas.

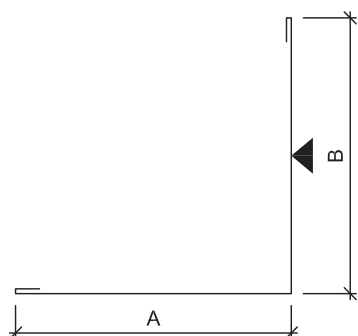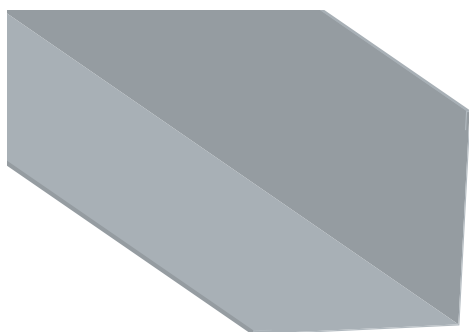

• Product properties

Product name	External corner flashing CA1EC12X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 12 B: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Design profiles and Cladding lamellas.

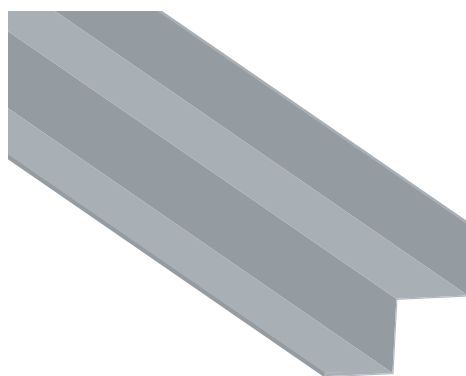

• Product properties

Product name	External corner flashing CA1EC13
Standard length	3000 mm
Special range	150–4000 mm
Blank width	176 mm
Weight	0,83 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

External corner flashing for Cladding lamellas.

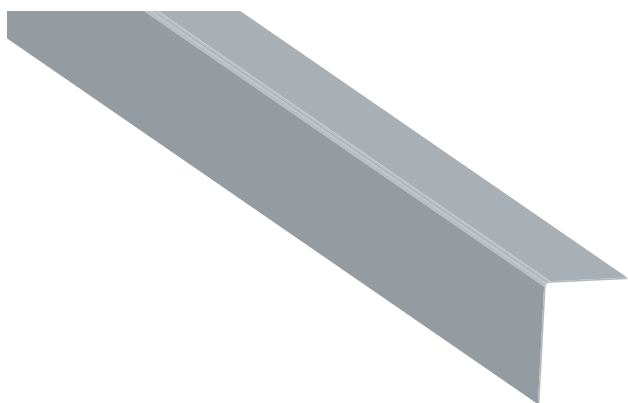

- **Product properties**

Product name	External corner flashing CA1EC15
Standard length	3000 mm
Special range	150–4000 mm
Blank width	82 mm
Weight	0,94 kg/m
Unit	m

- **Materials, coatings and colours**



1,5 mm steel Cor-Ten A

Minimum order sizes:

– No limitations

- **Intended use**

External corner flashing for Cladding lamellas (Cor-Ten).

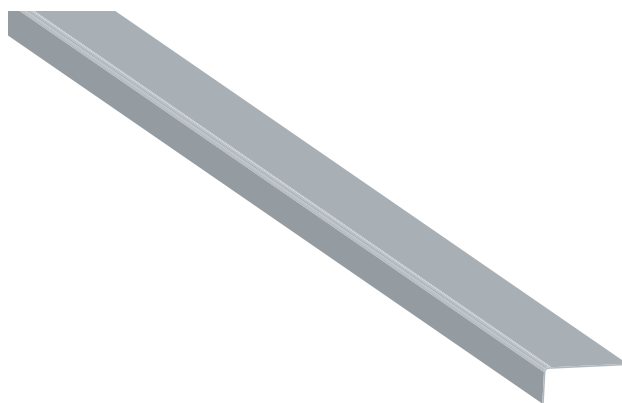

- **Product properties**

Product name	External corner flashing CA1EC16
Standard length	3000 mm
Special range	150–4000 mm
Blank width	47 mm
Weight	0,55 kg/m
Unit	m

- **Materials, coatings and colours**


1,5 mm steel Cor-Ten A

Minimum order sizes:

– No limitations

- **Intended use**

External corner flashing for Design profiles (Cor-Ten).

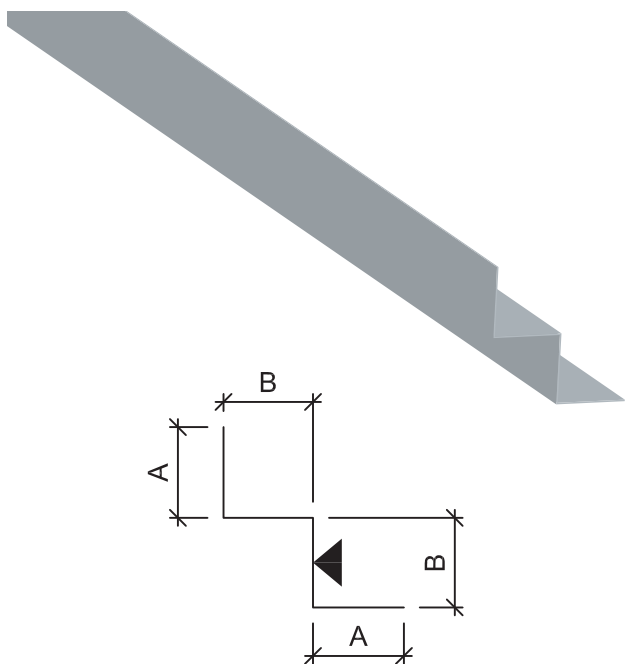

• Product properties

Product name	Internal corner flashing CA1IC1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 10 B: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Design profiles, Cladding lamellas and Liberta panels.

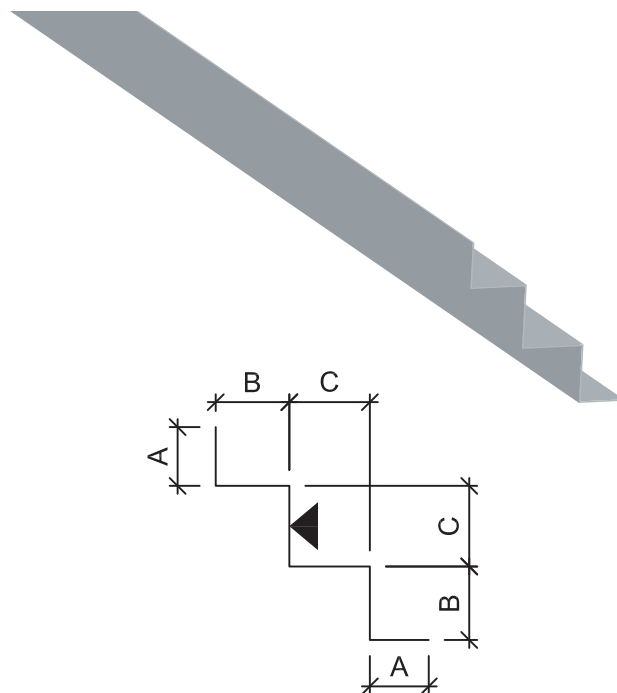

• Product properties

Product name	Internal corner flashing CA1IC2X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B,C measures
Minimum values	A: 10 B: 12 C: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Design profiles, Cladding lamellas and Liberta panels.

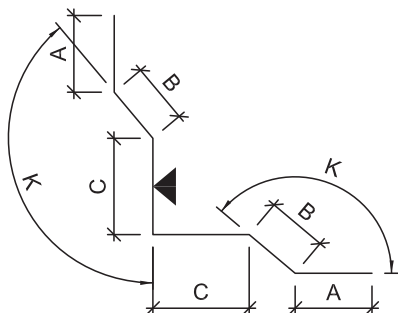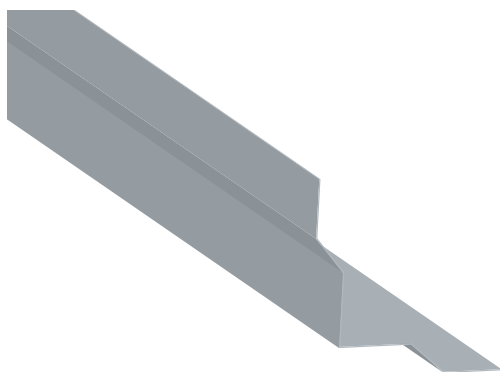

• Product properties

Product name	Internal corner flashing CA1IC5X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 12 C: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Design profiles, Cladding lamellas and Liberta panels.

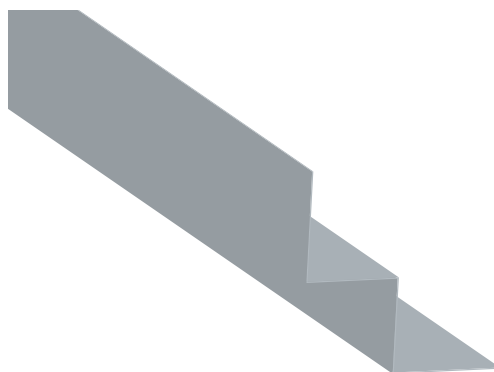

• Product properties

Product name	Internal corner flashing CA1IC6
Standard length	3000 mm
Special range	150–4000 mm
Blank width	208 mm
Weight	0,98 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Cladding lamellas.

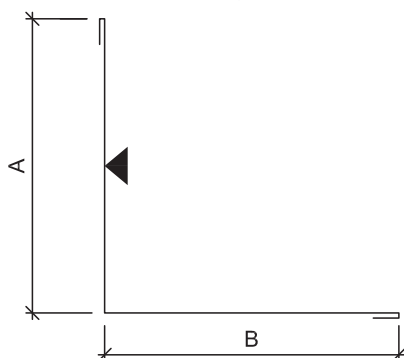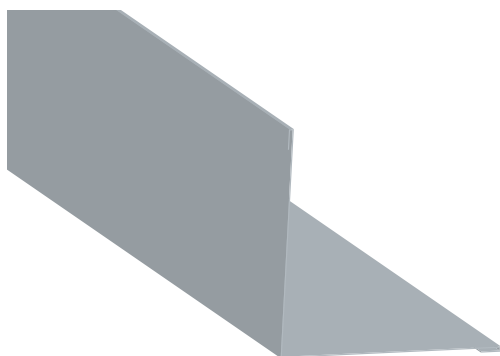

• Product properties

Product name	Internal corner flashing CA1IC7X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 12 B: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Cladding lamellas.

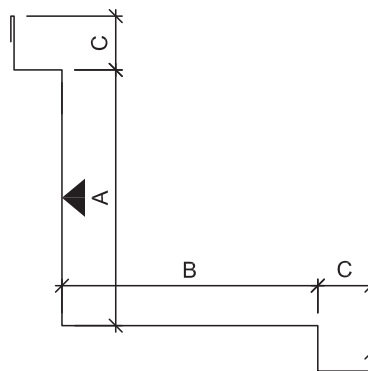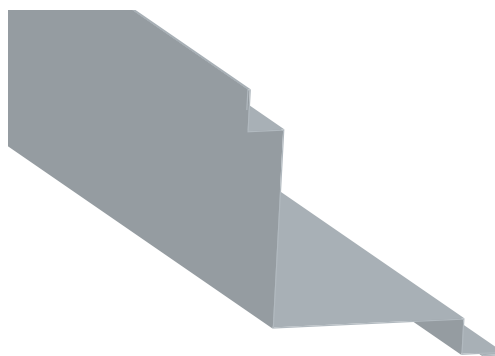

• Product properties

Product name	Internal corner flashing CA1IC8X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 12 C: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Cladding lamella Vertical 70.

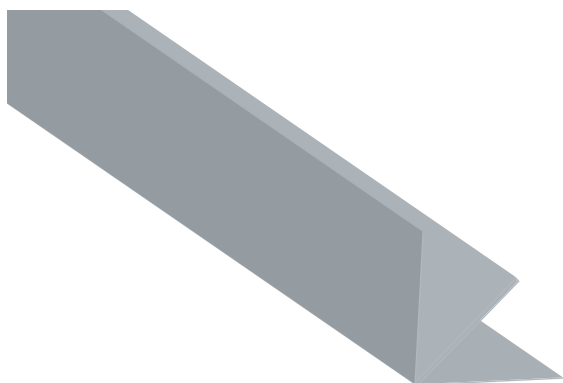

• Product properties

Product name	Internal corner flashing CA1IC9
Standard length	3000 mm
Special range	150–4000 mm
Blank width	262 mm
Weight	1,2 kg/m (steel)
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminium	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Cladding lamellas.

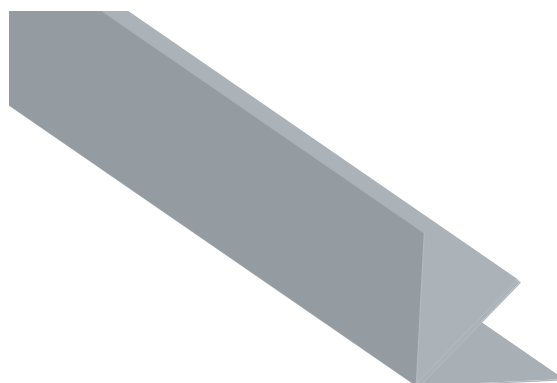

• Product properties

Product name	Internal corner flashing CA1IC10X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 20 B: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminium	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Internal corner flashing for Cladding lamellas.

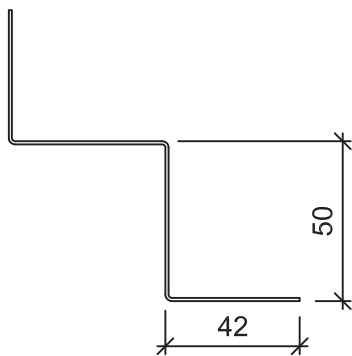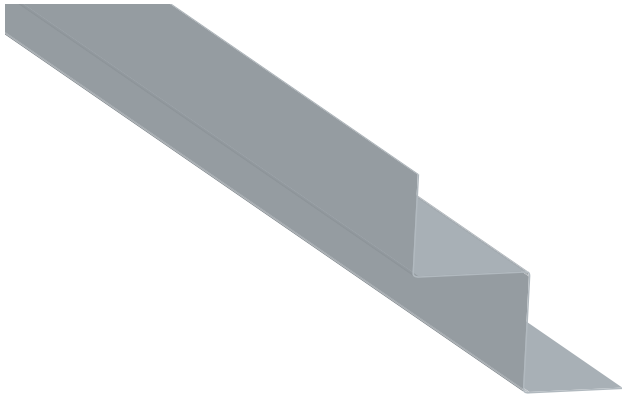

- **Product properties**

Product name	Internal corner flashing CA11C13
Standard length	3000 mm
Special range	150–4000 mm
Blank width	178 mm
Weight	0,83 kg/m
Unit	m

- **Materials, coatings and colours**



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

- **Intended use**

Internal corner flashing for Cladding lamellas and Liberta panels (Cor-Ten).

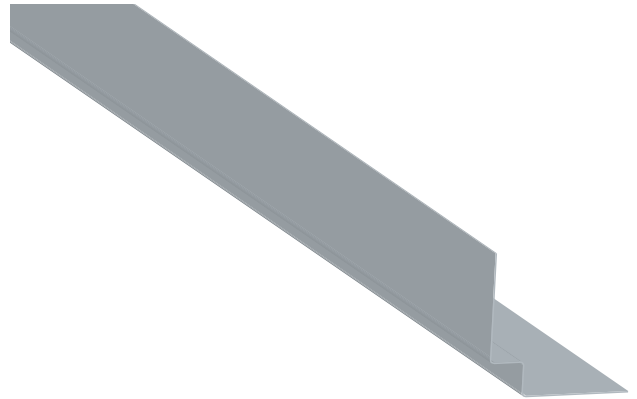

- **Product properties**

Product name	Internal corner flashing CA11C14
Standard length	3000 mm
Special range	150–4000 mm
Blank width	114 mm
Weight	0,54 kg/m
Unit	m

- **Materials, coatings and colours**



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

- **Intended use**

Internal corner flashing for Design profiles (Cor-Ten).

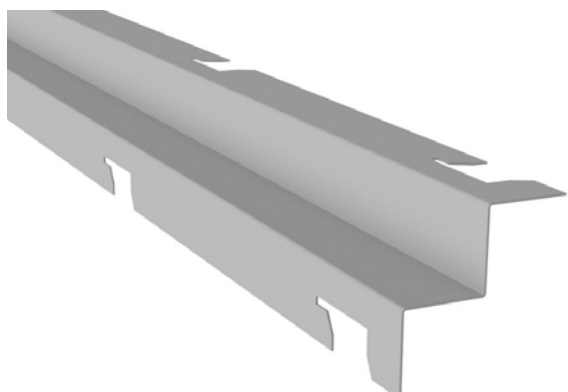

- Product properties**

Product name	Internal Corner flashing CA1IC15X
Standard length	3000 mm
Special Range	150–3000 mm
Blank width	Depends on A, B measures
Minimum values	A: 50 B: 50
Weight	–
Unit	m

- Materials, coatings and colours**

1,5mm	Steel Cor-Ten A
-------	-----------------

Minimum order sizes:



- No limitations

- Intended use**

Internal corner flashing for Liberta Cor-Ten 800 panels.

- Additional info**

Bracket cutout locations to be determined per project

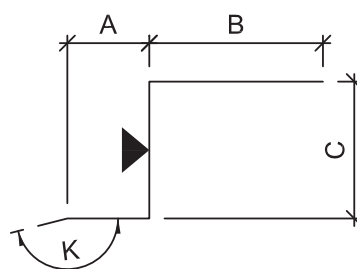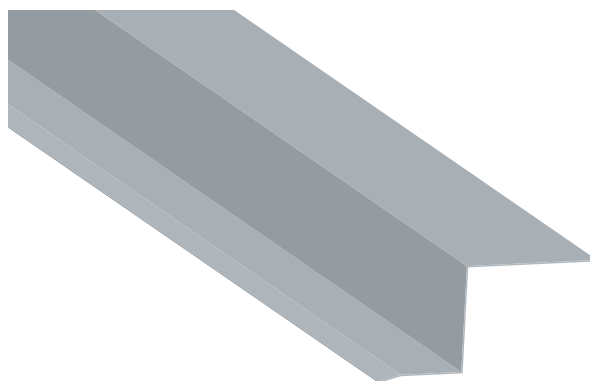

- Product properties**

Product name	Cover flashing CA1C1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 10 C: 12
Weight	–
Unit	m

- Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- Intended use**

To cover the interface between window or door and facade cladding.

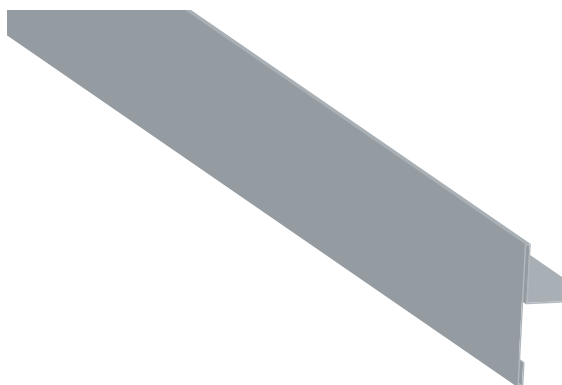

• Product properties

Product name	Cover flashing CA1C3X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 20 B: 10 C: 30
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.

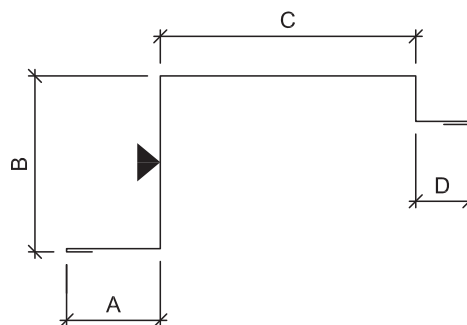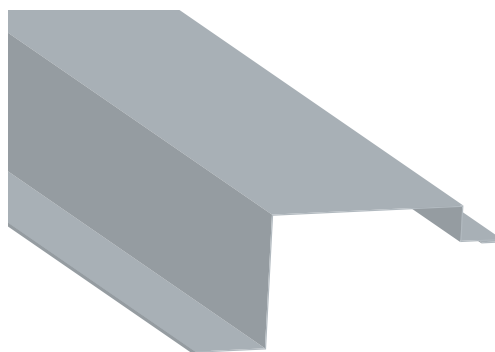

• Product properties

Product name	Cover flashing CA1C6X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C, D measures
Minimum values	A: 12 B: 12 C: 20 D: 12
Weight	-
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.

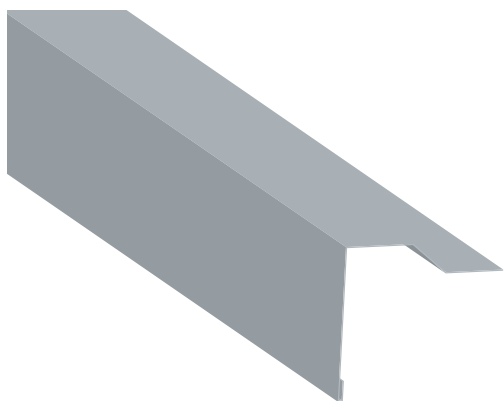

• Product properties

Product name	Cover flashing CA1C7X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C, D measures
Minimum values	A: 12 B: 12 C: 12 D: 10
Weight -	
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.



• Product properties

Product name	Cover flashing CA1C8X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 10 B: 12
Weight -	
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

Intended use

To cover the interface between window or door and facade cladding.

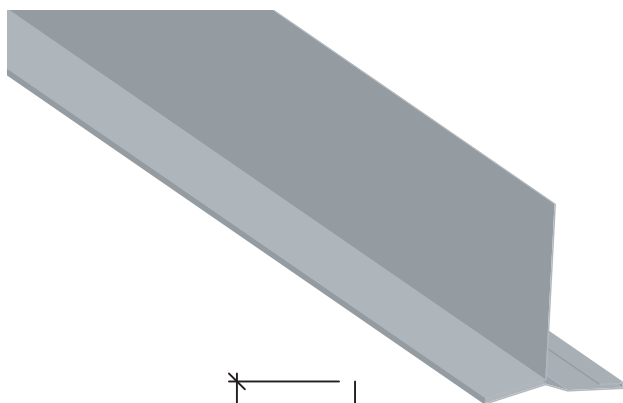

• Product properties

Product name	Cover flashing CA1C9X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 20 C: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.

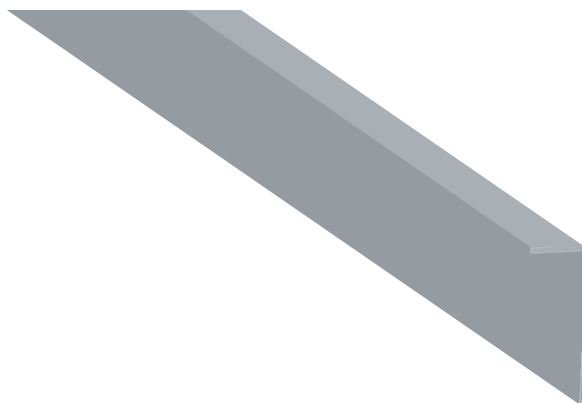

• Product properties

Product name	Cover flashing CA1C10X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 12 B: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.

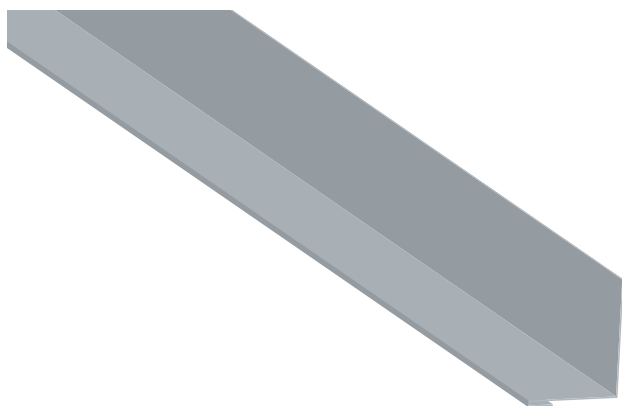

• Product properties

Product name	Cover flashing CA1C12X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 12 B: 10
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum

	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

To cover the interface between window or door and facade cladding.



• Product properties

Product name	Cover flashing CA1C13
Standard length	3000 mm
Special range	150–4000 mm
Blank width	78 mm
Weight	0,92 kg/m
Unit	m

• Materials, coatings and colours


1,5 mm	steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

To cover the interface between window or door and facade cladding (Cor-Ten).

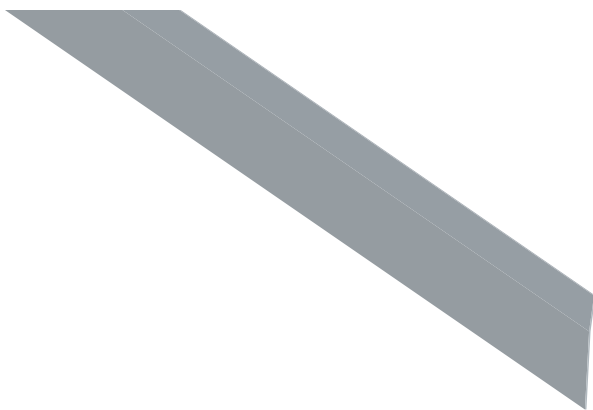

- **Product properties**

Product name	Cover flashing CA1C14
Standard length	3000 mm
Special range	150–4000 mm
Blank width	47 mm
Weight	0,50 kg/m
Unit	m

- **Materials, coatings and colours**



1,5 mm steel Cor-Ten A

Minimum order sizes:

- No limitations

- **Intended use**

To cover the interface between window or door and facade cladding (Cor-Ten).

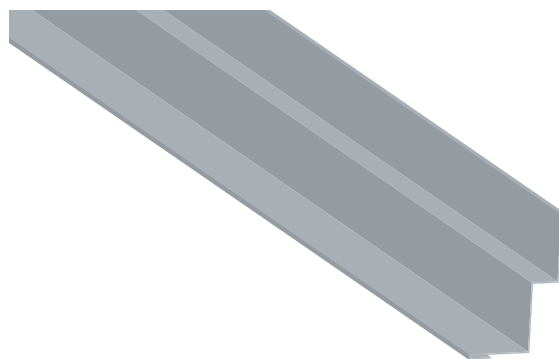

- **Product properties**

Product name	Cover flashing CA1C15X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 12 C: 12
Weight	-
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

To cover the interface between window or door and facade cladding.

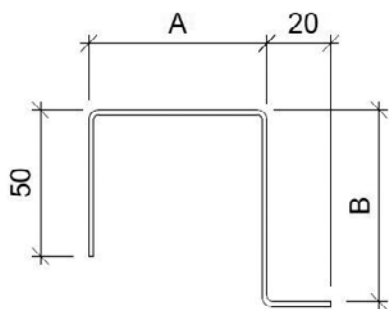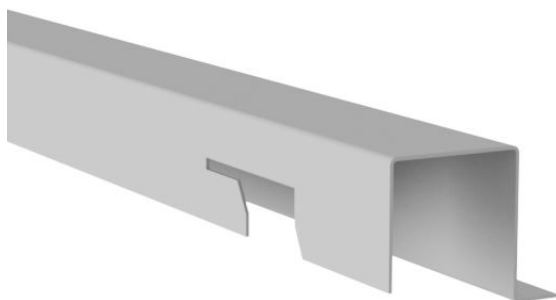

- **Product properties**

Product name	Cover flashing CA1C16X
Standard length	3000 mm
Special Range	150-3000 mm
Blank width	Depends on A, B measures
Weight	-
Unit	m

- **Materials, coatings and colours**

1,5mm	Steel Cor-Ten A
-------	-----------------

Minimum order sizes:



- No limitations

- **Intended use**

To cover the vertical interface between window or door and Liberta Cor-Ten 800 panels.

- **Additional info**

Bracket cutout locations to be determined per project

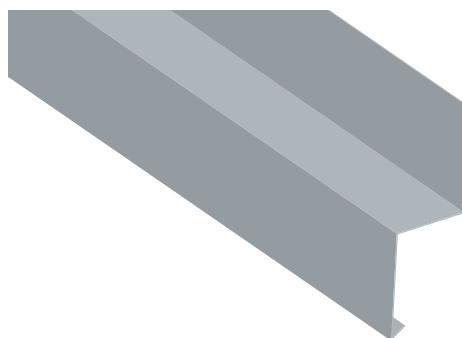

- **Product properties**

Product name	Eaves flashing CA1E1X
Standard length	3000 mm
Special range	150-4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 20 B: 12 C: 10
Weight	-
Unit	m

- **Materials, coatings and colours**

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

- **Intended use**

Eave flashing.

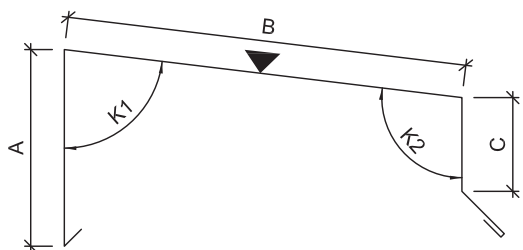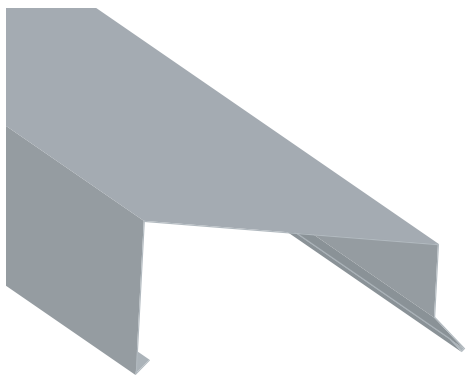

• Product properties

Product name	Eaves flashing CA1E2X
Standard length	3000 mm
Special range 1	50–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 20 B: 40 C: 12
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Eave flashing.

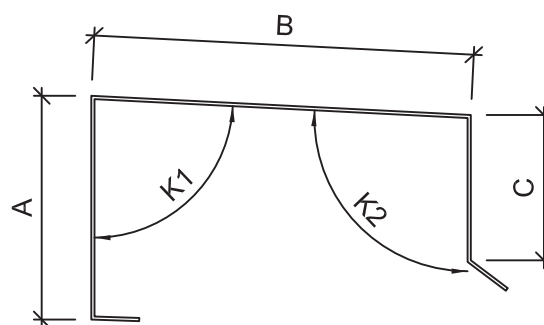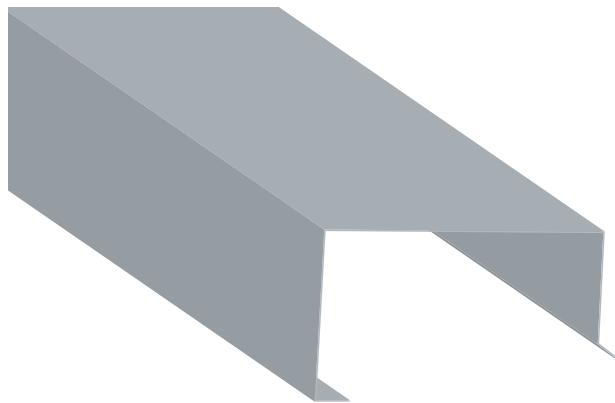

• Product properties

Product name	Eaves flashing CA1E3X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 20 B: 40 C: 15
Weight	–
Unit	m

• Materials, coatings and colours



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

Eave flashing (Cor-Ten).

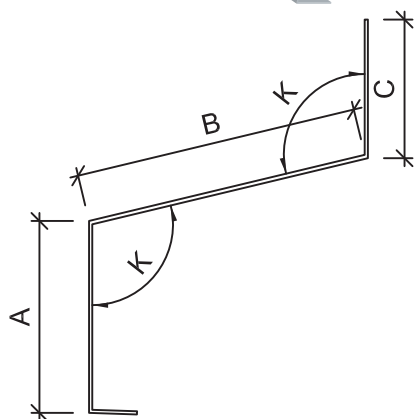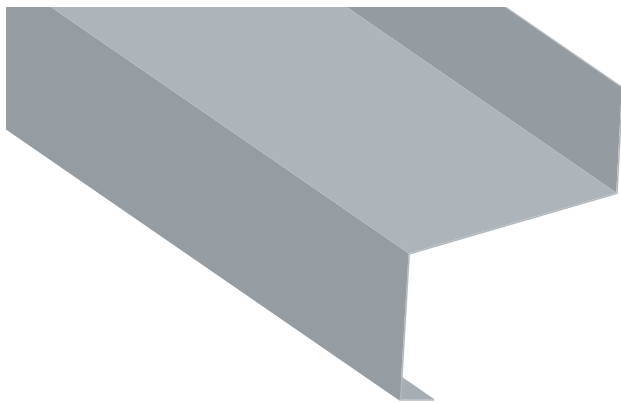

• Product properties

Product name	Eaves flashing CA1E4X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 12 B: 12 C: 12
Weight	–
Unit	m

• Materials, coatings and colours



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

Eave flashing (Cor-Ten).

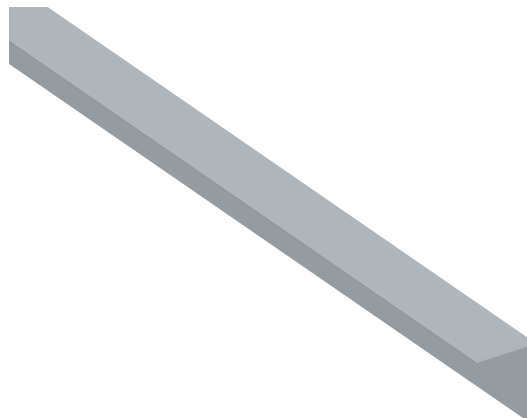

• Product properties

Product name	Storm flashing CA1ST1X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 10 B: 10
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

For preventing rain water from penetrating the eave structure.

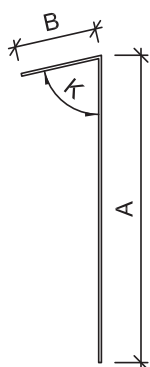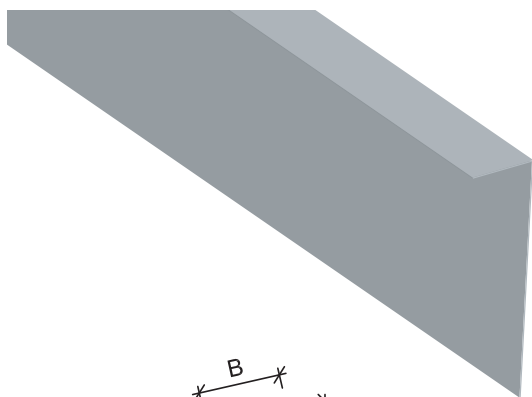

• Product properties

Product name	Storm flashing CA1ST2X
Standard length	3000 mm
Special range	150–4000 mm
Blank width	Depends on A, B measures
Minimum values	A: 12 B: 12
Weight	–
Unit	m

• Materials, coatings and colours



1,0 mm	Steel Cor-Ten A
--------	-----------------

Minimum order sizes:

- No limitations

• Intended use

For preventing rain water from penetrating the eave structure (Cor-Ten).

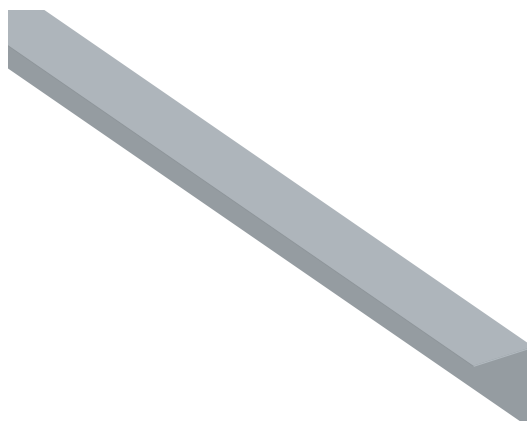

• Product properties

Product name	Support flashing CA1SU1X
Standard length	200 mm
Blank width	Depends on A, B measures
Minimum values	A: 10 B: 10
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum



	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

Support flashing for sill flashings.

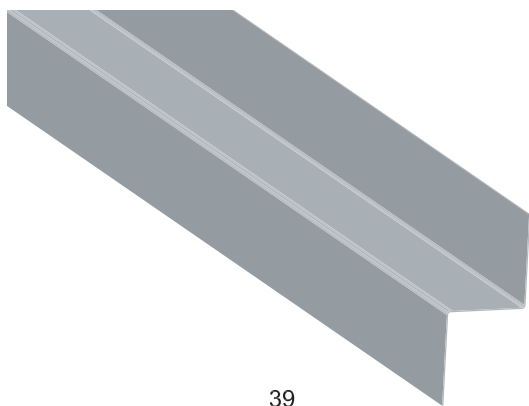

• Product properties

Product name	Support flashing CA1SU2
Standard length	3000 mm
Special range	150–4000 mm
Blank width	125 mm
Weight	1,2 kg/m
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum

	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request



Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

For supporting topmost cut lamella, used with following cladding lamella types:

- Lamella Groove 10
- Lamella Groove 20
- Lamella Groove 30

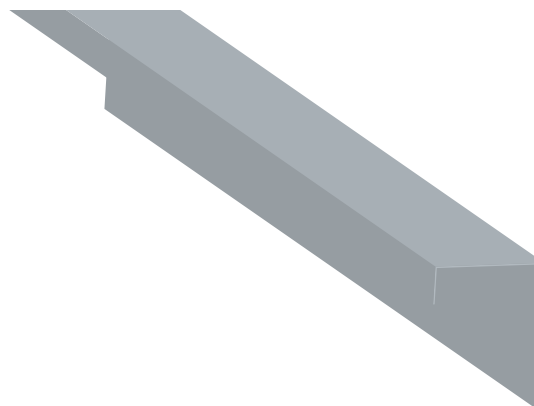

• Product properties

Product name	Reverse flashing CA1R1X
Standard length	200 mm
Blank width	Depends on A, B, C measures
Minimum values	A: 10 B: 12 C: 10
Weight	–
Unit	m

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum

	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request


Minimum order sizes:

- Standard chart: No limitations
- Colorful chart: Evaluated case by case

• Intended use

For preventing rain water from penetrating the eave structure, used with following Liberta panels:

- Liberta Cor-Ten 600
- Liberta Cor-Ten 700
- Liberta Cor-Ten 800

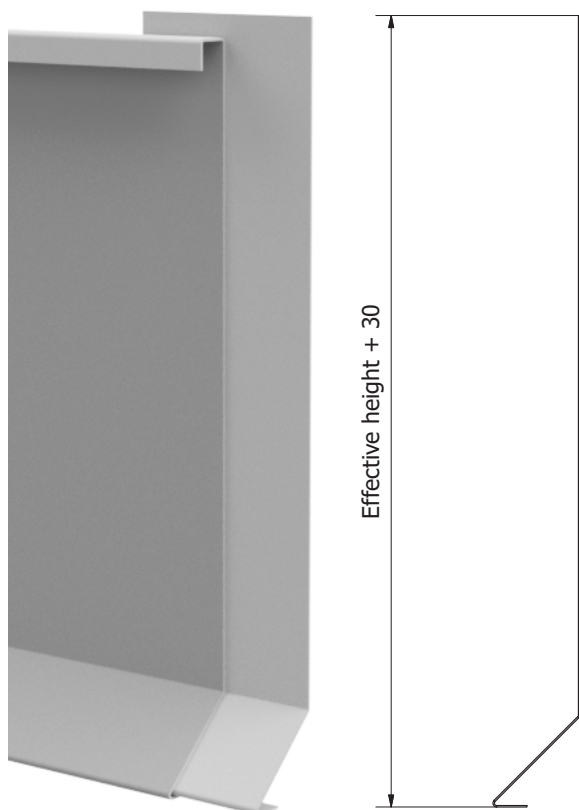

• Product properties

Product name	Joint piece CA1J1
Standard length	90 mm
Blank width	358 mm
Weight	0,15 kg/pcs (steel)
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available by request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available by request
		Powder paint	RR, RAL and NCS colours available by request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Sharp 40 if joint flashings are not used.

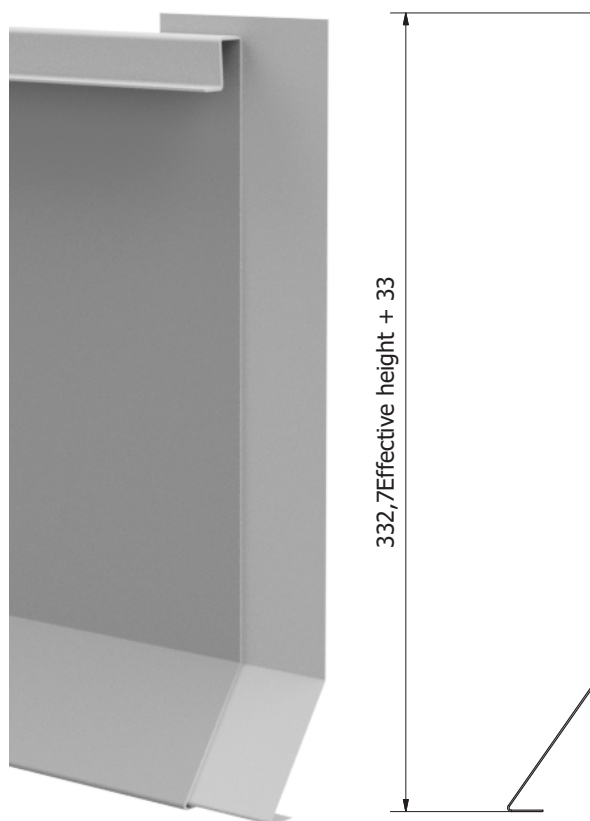

• Product properties

Product name	Joint piece CA1J2
Standard length	90 mm
Blank width	358 mm
Weight	0,15 kg/pcs (steel)
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Sharp 45 if joint flashings are not used.

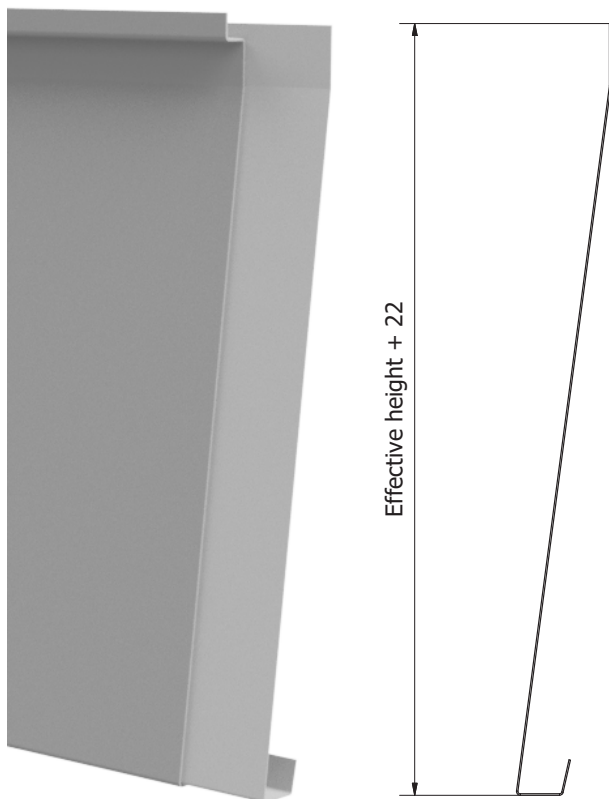

• Product properties

Product name	Joint piece CA1J6
Standard length	90 mm
Blank width	356 mm
Weight	0,15 kg/pcs (steel)
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum

	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Lap 60 if joint flashings are not used.



• Product properties

Product name	Joint piece CA1J8
Standard length	90 mm
Blank width	367 mm
Weight	0,15 kg/pcs (steel)
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Straight 100 if joint flashings are not used.

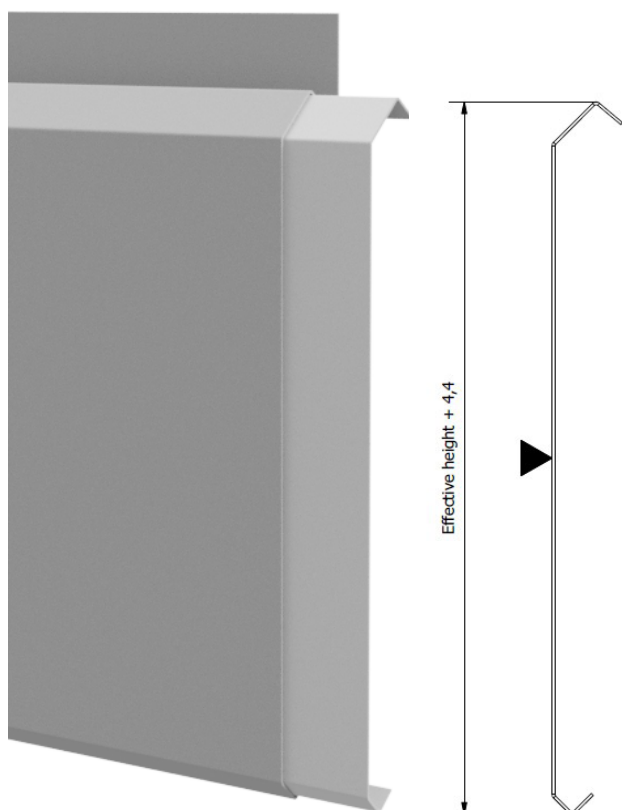

• Product properties

Product name	Joint piece CA1JP10
Standard length	90 mm
Blank width	Effective height + 40 mm
Weight	-
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Groove 10 if joint flashings are not used

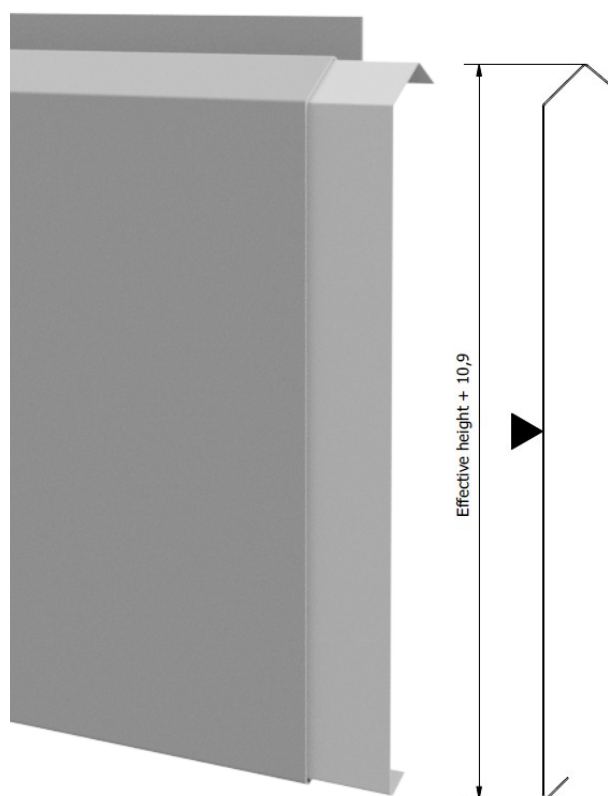

• Product properties

Product name	Joint piece CA1JP20
Standard length	90 mm
Blank width	Effective height + 45 mm
Weight	-
Unit	pcs

• Materials, coatings and colours

0,6 mm	Colour coated steel
0,7 mm	Colour coated aluminum


	Colour chart	Coating	Colour
Steel	Standard chart	HIARC	RR20, 21, 23, 40, 41, 42, 43
		HIARC Matt	RR40, 41, 45
	Colourful chart	HIARC & Powder paint	RR11, 22, 24, 26, 29, 30, 31, 32, 33, 34, 35, 36, 37, 44, 45, 750
		Powder paint	RAL and NCS colours available on request
Aluminum	Colourful chart	PVDF	RAL and NCS colours available on request
		Powder paint	RR, RAL and NCS colours available on request

Minimum order sizes:

- Standard chart: No limitations
- Colourful chart: Evaluated case by case

• Intended use

For closing the vertical joints of Lamella Groove 20 if joint flashings are not used



- **Product properties**

Product name:	Screw S3H48022D02S4C 250
Size:	diameter 4.8 mm, length 22 mm
Head:	8 mm, hexagon
Drilling capacity:	Max 3.0 mm
Clamping range:	Max 3.0 mm
Package size:	250 pcs

- **Material**

Screw:	Austenitic stainless steel
Washer:	14 mm stainless steel with vulcanized EPDM rubber
Corrosion class:	C4


- **Intended use**

For fastening following products to metal support studs:

- All types of Libertas (except Cor-Ten)
- All types of Lamellas (except Cor-Ten)
- Design profiles T10B, S18 and S55

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3H60029D03S6B 100
Size:	diameter 6 mm, length 29 mm
Head:	8 mm, hexagon
Drilling capacity:	Max 3.0 mm
Clamping range:	Max 9.0 mm
Package size:	100 pcs

- **Material**

Screw:	Austenitic stainless steel
Washer:	16 mm stainless steel with vulcanized EPDM rubber
Corrosion class:	C4


- **Intended use**

For fastening following products to metal support studs:

- All types of Cor-Ten Libertas
- All types of Cor-Ten Lamellas

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3H4825D4S9.5
Size:	diameter 4,8 mm, length 25 mm
Head:	1/4" (6,35 mm), hexagon
Drilling capacity:	Max 3.0 mm
Clamping range:	Max 13.0 mm
Package size:	No limitations

- **Material**

Screw:	Stainless steel
Washer:	9,5 mm aluminum with vulcanized EPDM rubber
Corrosion class:	C3


- **Intended use**

For fastening following products to metal support studs:

- All types of Design Profiles (incl. Cor-Ten)

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3H4835D02S4C 250
Size:	diameter 4,8 mm, length 35 mm
Head:	8 mm, hexagon
Drilling capacity:	Max 2.0 mm
Package size:	250 pcs

- **Material**

Screw:	Austenitic stainless steel
Washer:	14mm stainless steel with vulcanized EPDM rubber
Corrosion class:	C4


- **Intended use**

For fastening following studs to timber frame:

- All types of support studs (incl. Cor-Ten)
- LED studs (requires pre-punched holes to studs)

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3H55022L02S4B 100
Size:	diameter 5,5 mm, length 22 mm
Head:	8 mm, hexagon
Drilling capacity:	Max 2.0 mm
Clamping range:	Max 2.0 mm
Package size:	100 pcs

- **Material**


Screw:	Austenitic stainless steel
Washer:	14 mm stainless steel with vulcanized EPDM rubber
Corrosion class:	C4

- **Intended use**

For fastening support studs (excluding Cor-Ten studs) to outer facing of Ruukki sandwich panels.

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3T4826PA0E 1000
Size:	diameter 4,8 mm, length 26 mm
Head:	Torx T20
Drilling capacity:	Max 1.8 mm (steel)
Package size:	1000 pcs

- **Material**

Screw:	Austenitic stainless steel
Washer:	10 mm aluminum with vulcanized EPDM rubber
Corrosion class:	C4


- **Intended use**

For fastening following products to wooden support studs:

- All types of Design Profiles (incl. Cor-Ten)
- Flashings (e.g. to wooden window frames)

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3R48022D02A0B 100
Size:	diameter 4,8 mm, length 22 mm
Head:	Torx T20W
Drilling capacity:	Max 2.0 mm
Clamping range:	Max 2.0 mm
Package size:	100 pcs

- **Material**


Screw:	Austenitic stainless steel
Washer:	10 mm aluminum with vulcanized EPDM rubber
Corrosion class:	C4

- **Intended use**

For fastening flashings to claddings or aluminum window frames.

- **Note**

Available also as painted to RAL colours.



- **Product properties**

Product name:	Screw S3T7575CS0A 50
Size:	diameter 7,5 mm, length 75 mm
Head:	Torx T30
Clamping range:	Max 10.0 mm
Package size:	50 pcs

- **Material**


Screw:	Austenitic stainless steel (A5 / EN 1.4571)
Washer:	10 mm stainless steel with vulcanized EPDM rubber
Corrosion class:	C5

- **Intended use**

For fastening support studs to concrete.

- **Note**

Requires pre-drilling (d=6mm), drilling depth min. 65mm. Concrete class min. C20/25.



- **Product properties**


Product name: **Screw S3H65024L04BS6E 1000**
 Size: diameter 6,5 mm, length 24 mm
 Head: 8mm, hexagon
 Drilling capacity: Max 2.0 mm
 Clamping range: Max 6.0 mm
 Package size: 1000 pcs

- **Material**

Screw: Austenitic stainless steel
 Washer: 16 mm stainless steel with vulcanized EPDM rubber
 Corrosion class: C4

- **Intended use**

For fastening following products to outer facing of Ruukki sandwich panel:
 – Cor-Ten support studs
 – LED studs (requires pre-punched holes to studs)



- **Product properties**

Product name: **Screw S3T5525D06S4B 100**
Cor-Ten Brown
 Size: diameter 5,5 mm, length 25 mm
 Head: Torx T20
 Drilling capacity: Max 6.0 mm
 Clamping range: Max 6,0 mm
 Package size: 100 pcs
 Colour: Cor-Ten Brown

- **Material**

Screw: Stainless steel
 Washer: 14 mm stainless steel with vulcanized EPDM rubber
 Corrosion class: C4

- **Intended use**

For fastening following products to metal support studs:
 – All types of Cor-Ten Libertas
 – All types of Cor-Ten Lamellas

- **Note**

Screw head is brown, however, as Cor-Ten cladding is changing its colour over time, the screw colour is not a full match.



- **Product properties**

Product name: **Sealing strip EA3SS410**
 Size: width 10 mm,
 thickness 4 mm

- **Material**

closed-cell polyethylene plastic,
 one-sided adhesive tape

- **Intended use**

installed between the window or door frames and
 cover flashings.



- **Product properties**

Product name: **Separating piece EPDM
 CA3SP814**
 Size: width 14 mm,
 thickness 8 mm

- **Material**

EPDM rubber

- **Intended use**

Installed into the fastening holes of Cor-Ten Libertas
 and Lamellas for separation purpose.



- **Product properties**

Product name: **Separating strip EPDM
 CA3SE410**
 Size: width 10 mm,
 thickness 4 mm

- **Material**

EPDM cellular rubber,
 one-sided glass fibre reinforced adhesive tape

- **Intended use**

Installed to following places for separation purposes
 in Cor-Ten structures:

- Between Design Profiles and Support studs
- Between support studs and wall structure
- Between flashings and cladding products.



- **Product properties**

Product name: **Separating strip
 EPDM CA3SE420**
 Size: width 20 mm,
 thickness 4 mm


- **Material**

EPDM cellular rubber,
 one-sided glass fibre reinforced adhesive tape

- **Intended use**

Installed to following places for separation purposes
 in Cor-Ten structures:

- Between Design Profiles in overlapping areas
- Between support studs and wall structure
- Between flashings and cladding products.

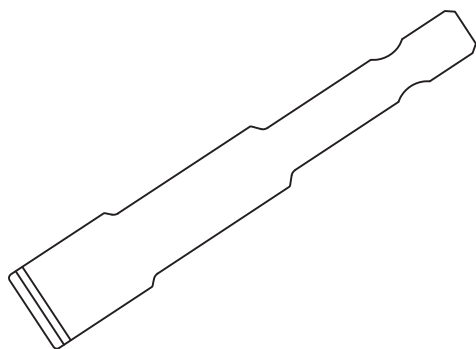


- **Product properties**

Product name: **Fastening socket CA21165**
 Size: diameter 11 mm,
 length 65 mm
 Head: '1 / 4 " (6.35 mm), hexagon

- **Intended use**

To fasten the S3H4825D4S9.5 screws.

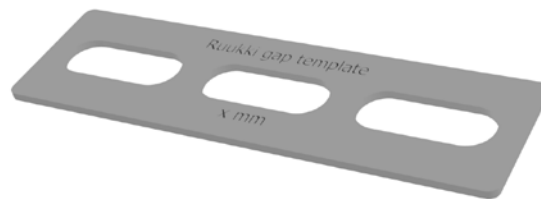

- **Product properties**

Product name: **Gap template CA3JGT**
 Length: 250 mm
 Width: 70 mm
 Thicknesses: 5 mm (5 mm joint)
 10 mm (10 mm joint)
 Package size: 4 pcs

- **Material**

Plastic


- **Intended use**

Used in installation phase for ensuring correct joint gap width and thermal expansion allowance in Liberta panel joints. Used for following products:

- Liberta Original 102 and 102 Grande
- Liberta Elegant 500 and 500 Grande
- Liberta Elegant 550

- **Note**

Please specify the gap template thickness upon order. Package contains 4 templates of selected thickness.



- **Product properties**

Product name: **Repair paint 0,33 L RA6RP033**
 Gloss: Semi-gloss
 Colours: RR11, 20, 22, 24, 29, 30, 32, 33, 34, 35, 37, 40, 42, 43
 Package size: 1 tin (0.33 l)

- **Intended use**

For re-painting scratched colour coated steels.



- **Product properties**

Product name: **Repair paint 0,1 l RA6RP01**
 Gloss: Matt
 Colours: RR11, RR20, RR22, RR23, RR25, RR29, RR30, RR32, RR33, RR34, RR35, RR36, RR37, RR40, RR41, RR42, RR45
 Package size: 1 bottle (0,1 l)

- **Intended use**

For touch-up painting of scratched colour coated steels.



- **Product properties**

Product name: **Repair paint matt 24ml RA6RP0024M**
 Gloss: Matt
 Colours: RR11, 20, 21, 22, 23, 25, 29, 30, 32, 33, 35, 36, 37, 40, 41, 43, 44, 45, 750,
 Package size: 1 bottle (24 ml)

- **Intended use**

For touch-up painting of scratched colour coated steels.



- **Product properties**

Product name: **Repair paint matt 30ml RA6RP0030M**
 Gloss: Matt
 Colours: RR11, 21, 22, 23, 29, 32, 33, 750
 Package size: 1 bottle (30 ml)

- **Intended use**

For touch-up painting of scratched colour coated steels.

RAUTA
Facades ■ Roofs ■ Buildings

Vector Business center
10G Starokievskaya Str.
Kiev, Ukraine 04665
+38 044 364 85 73
info@rautagroup.com
www.rautagroup.com

RUUKKI

Copyright © 2019 Ruukki Construction. All rights reserved. Ruukki and Ruukki's product names are trademarks or registered trademarks of Rautaruukki Corporation, a subsidiary of SSAB.